Resolve Careers: build brief with screens

Nov 10, 2026 · @Simeon

Purpose and how to use this brief

Resolve Careers is a second mode of the Resolve 2 desktop app. It reuses the built shell, daily screens and Pack A intake frame, swaps the middle sidebar group, and adds the Pipeline, My CV and Interview recorder views. Desktop only. This brief turns the design brief of 10 Nov 2026 and the 46 canvas screens into build-ready specs, one section per screen group, so each section can become one Tech Lead prompt.

- Code baseline: github.com/simeonfab/Resolve2, main at 0a8d0c7 (8 Nov 2026), Rust with eframe/egui, self-test 232 passed.
- Visual source of truth: the Resolve Careers canvas. Each screen below names its artboard.
- Content in the screenshots is sample data. Copy in quotes is final unless marked as a proposal.
- Build Careers after redesign Phases 3, 4 and 5. Careers becomes Phase 6 (the phone phase is dropped).

To write a build prompt: take one section, add the tokens section and the modes section, name the files it touches, and ask for the done-when checks in the last section.

Design tokens and shared rules

Careers adds no new tokens. Every colour, size and width comes from `src/ui/theme.rs` (`tok`, `size`, `space`) and components from `widgets.rs`. No colour or size literal anywhere else.

Use	Token	Value
Sidebar	`NAV_BG`	#1E1E1A
Work area	`SURFACE`	#F2EDE4
Cards	`CARD` + `BORDER`	#FFFFFF, #DDD8CE
Dominant dark card (one per screen)	`INK`	#1A1A18

Use	Token	Value
Primary button, progress bars, focus	`AMBER`	#C8A040
Amber as text, tinted panels	`AMBER_TEXT`, `AMBER_LIGHT`	#7A5B12, #FBF5E6
Eyebrows, links, errors, Interviews calendar	`TERRACOTTA`, `TERRACOTTA_TINT`	#8B4A2A, #F5E8E1
Pass, Apply, Strong, Follow-ups calendar	`GREEN`, `GREEN_TEXT`, `GREEN_TINT`	#5E7D4F, #3F5A33, #E8EFE3
Secondary text	`INK_SOFT`	#4A4A44
Body text	Inter 14, line height 1.5	bundled
One headline per screen	DM Serif Display	bundled
Sidebar width	`SIDEBAR`	248
Radius	`RADIUS`, `RADIUS_SMALL`	10, 6

Shared rules for every Careers screen:

- Header pattern: eyebrow (search name, terracotta, caps), serif title 30, one dim line under it, actions on the right.
- Verdict and score tags: Apply and Strong = green tint; Partial, closing soon and preference = amber tint; Skip, Missed, rejection and errors = terracotta tint; neutral = surface sunk.
- Every move, delete and AI write shows an Undo toast.
- An AI failure stays inside its own card. Everything else on the screen loads from local data.
- The Ask Resolve bar sits at the bottom of every screen except AI Team, with three suggestion chips above it.

Modes: data model and per-mode tables

A workspace has one mode, set when it is created and never changed. Switching workspace switches the mode. Modes: PM (today's app), Careers (this brief), YGO (slot only, not built).

1. Add `mode` to `WorkspaceData` in `model.rs`, with a serde default of PM. Every existing workspace loads as PM with no migration.
2. Turn each fixed table into a per-mode table, picked by the open workspace's mode. No view is copied per mode.
3. Everything else stays shared: shell, components, motion, Undo, Search, Settings.

Table	File	Careers content (section)
`NAV`	`src/ui/nav.rs`	Sidebar groups and items (Shell)
`FRAMEWORKS`	`src/ui/nav.rs`	Gates, CV templates, Cover letter, Interview prep, Offers and negotiation, Improvement playbook, Advice (Frameworks)
`KNOWLEDGE_TABS`	`src/ui/nav.rs`	CVs and cover letters, Evidence bank, LinkedIn, Job ads, Interview notes, Offers, Advanced: databases (Knowledge base)
`AskCopy`	`src/ui/nav.rs`	Placeholder and three suggestions per screen (Shell)
`GUIDE`	`src/ui/help.rs`	Careers guide sections (Help)
`TARGETS`	`src/resolve/journey.rs`	Careers intake targets, cap 8 (Intake 03)
AI Team roles and role actions	team	General assistant, Scout, Reviewer, Tailor, Coach, Negotiator (AI Team)
Intake rail steps	`RAIL_STEPS`	Get started, Bring it in, Confirm understanding, Your kit

New data the Careers mode stores:

- Pipeline records: company, role, stage, closed reason, source, link, closing date, saved ad (text or image), verdict per gate, documents sent, timeline, people, interviews, offer, outcome, notes, linked tasks.
- CV assets: master CV, templates with the roles each suits, sent versions linked to their Pipeline record, LinkedIn fixes with done state, the latest CV check.
- Gates: rule, Hard gate or Preference, why it matters.

- Evidence bank entries: proof point, theme, source role, number (optional), source.
- Interviews: round, recording file, transcript, per-answer score, analysis summary.
- Search settings: weekly target, daily hunt target, Scout schedule and sources.

Open for Tech Lead: store the Pipeline as a database on the existing CRM support (records linked to pages and tasks) or as a new model type. Report the choice before building.


Shell: sidebar, workspace switcher, Ask Resolve

The Phase 1 shell stays as built. Only the middle group, the workspace label and the Ask wording change.

Sidebar


Group	PM mode	Careers mode
Top row	Workspace name	Workspace name + small "Careers" label, then Add task and Ask AI
WORKSPACE	Home, Projects, Calendar	Home, Projects, Calendar
Middle group	YOUR PROJECT: Overview, Roadmap, Tasks, Frameworks, Knowledge base	YOUR SEARCH: Pipeline, My CV, Stats, Tasks, Interview recorder, Frameworks, Knowledge base
COLLABORATION	AI Team, Handoffs	AI Team, Handoffs
Footer	Settings, Help, user	Same

- The picker under YOUR SEARCH chooses the search (most users have one). It shows a green dot and the search name.
- Pipeline takes the slot Overview and Roadmap held. My CV sits between Pipeline and Stats.
- Active item: amber-on-nav tint, amber icon. Collapse to 64 works as built.

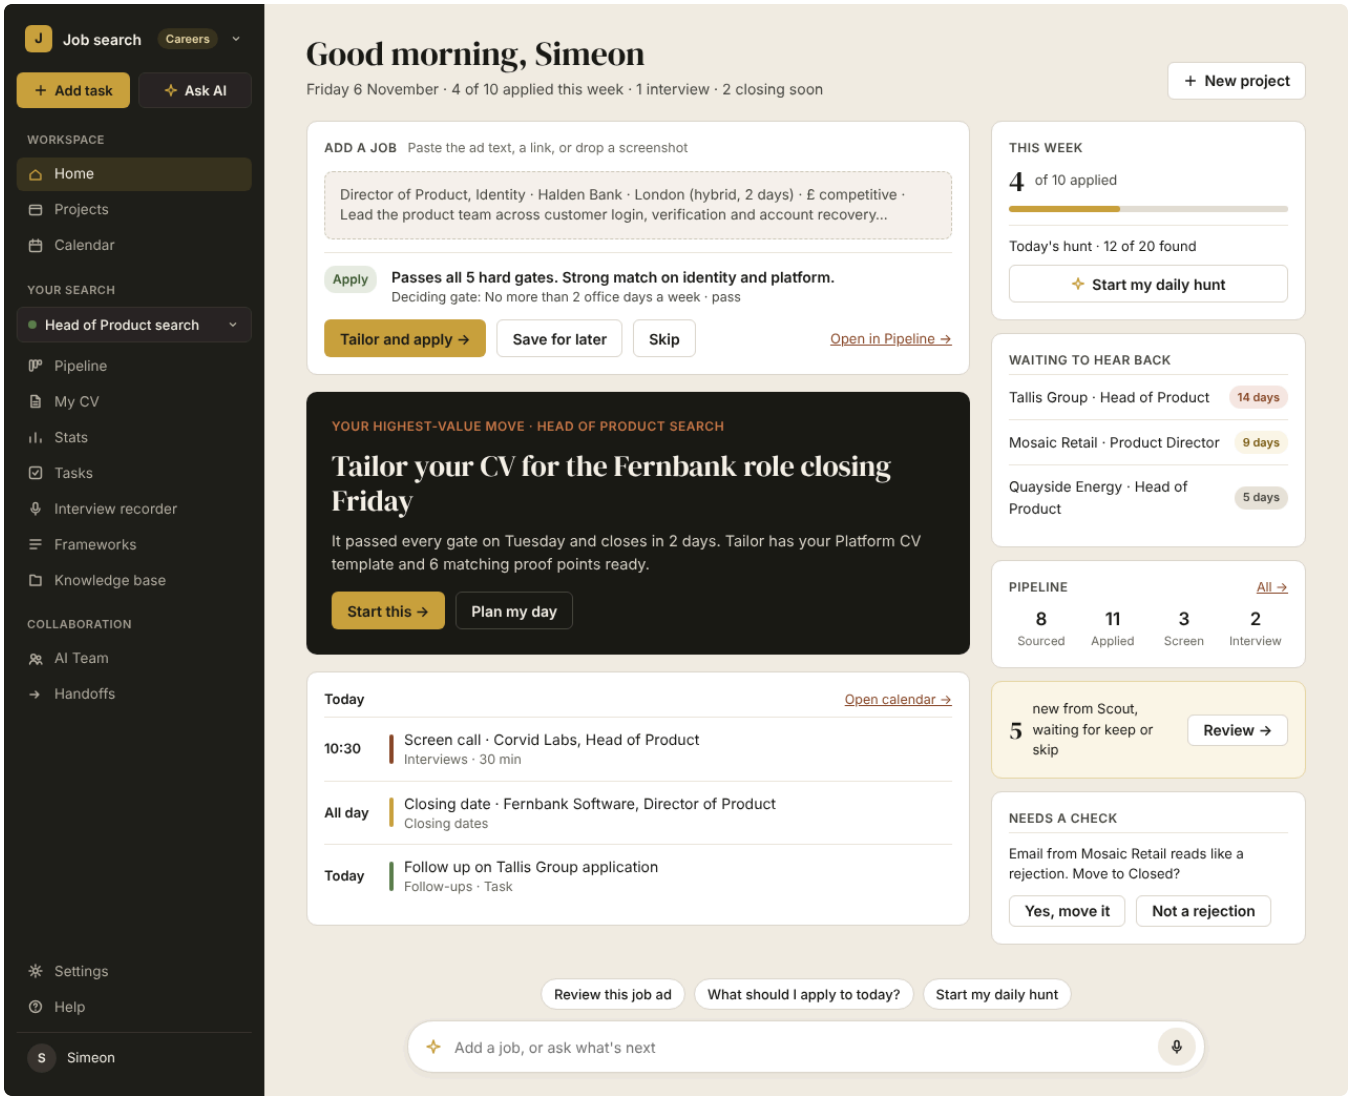

Workspace switcher

Each workspace row shows its mode label (PM or Careers). The menu ends with "Start something new with Resolve", which opens intake 01. Inside a Careers workspace, "+ New project" opens the Careers intake for a second search with its own gates.

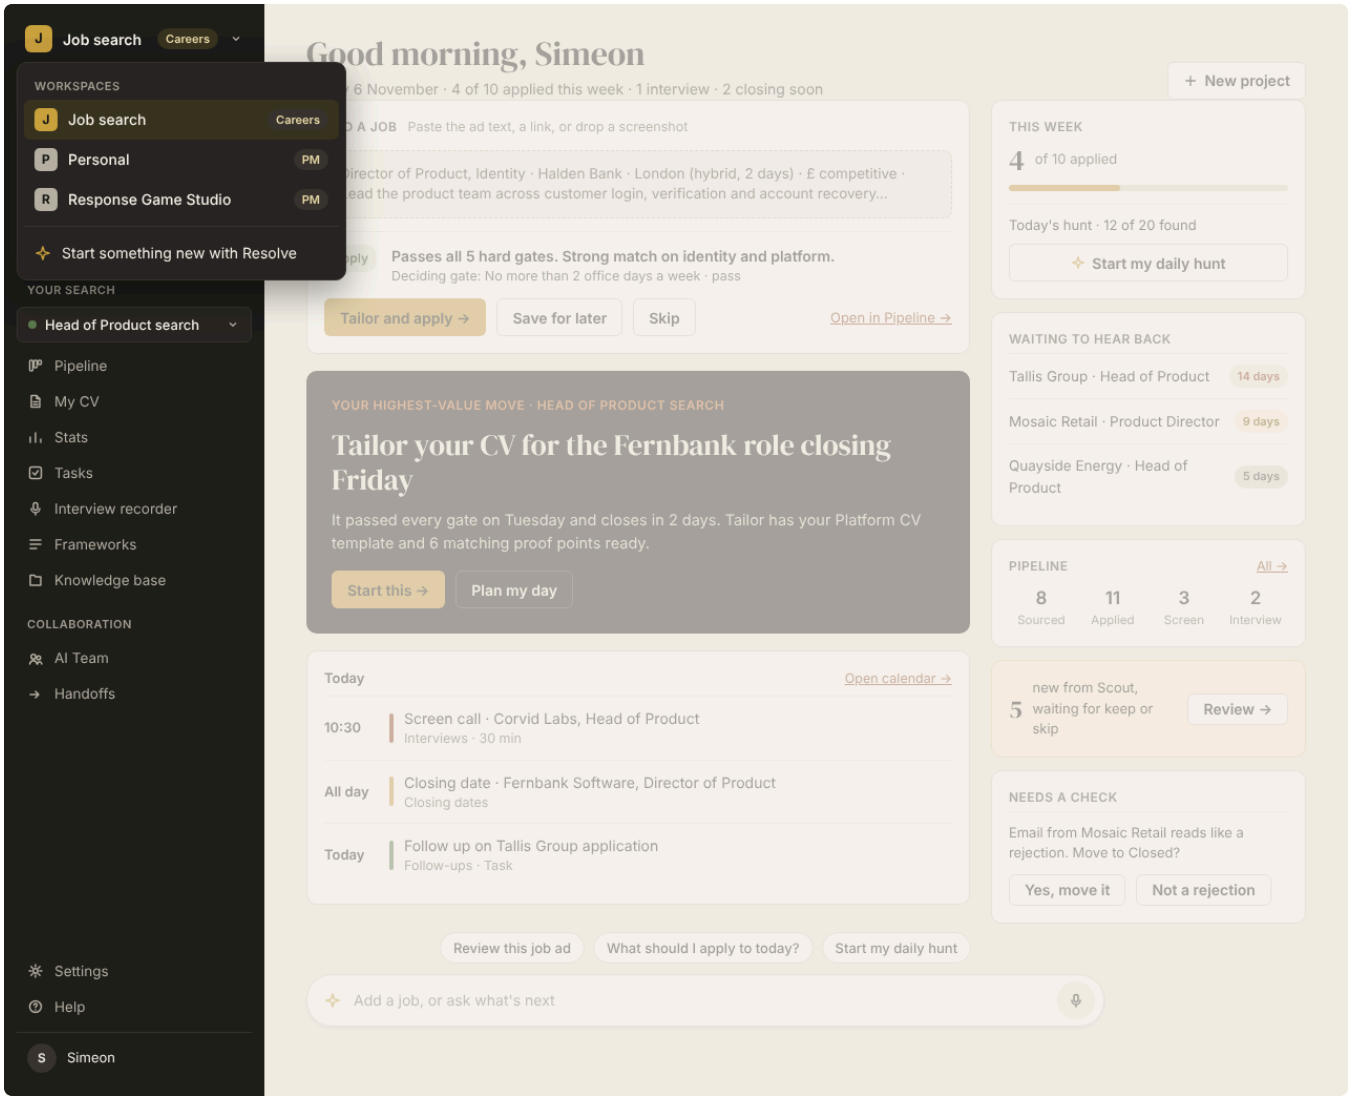

Ask Resolve wording (Careers)

Screen	Placeholder	Suggestions
Home	Add a job, or ask what's next	Review this job ad · What should I apply to today? · Start my daily hunt
Pipeline	Ask about your applications	Who haven't I heard back from? · What closes this week? · Move a role to Interview
My CV	Ask about your CV	What's weakest on my CV? · Rebuild my CV for this job · Which proof points need a number?

Screen	Placeholder	Suggestions
Stats	Ask about your numbers	Where am I dropping off? · Am I on target this week? · What should I change?
Tasks	Add a task, or ask what's next	Add a follow-up · What's waiting to hear back? · Clear my captured inbox
Interview recorder	Ask about your interviews	What did I struggle with last time? · Drill me on my weak spots · Prep me for my next interview
Frameworks	Ask about your gates and templates	Is my target too broad? · Tighten my gates · Update my cover letter template
Knowledge base	Find or capture something about your search	What proof do I have for this skill? · Add a proof point · Which CV did I send here?
Calendar	Ask about your schedule	Plan my day · Which interviews are coming up? · Which closing dates are this week?
Handoffs	Ask about a handoff	Same as PM mode

AI Team shows no bar, as in PM mode.


Careers intake, screen by screen

The Careers intake uses the Pack A frame unchanged: dark top bar with a "Careers" label and Save and exit, the left rail of four steps, the light work pane, states ST1 to ST6 and resume. Only content changes. The user ends ready to apply: gates, CV and cover letter templates, an evidence bank, LinkedIn fixes and a weekly target.

Rail steps: 1 Get started, 2 Bring it in, 3 Confirm understanding, 4 Your kit.


01 Name

Same as PM: "What's your name?" with one field and Continue.

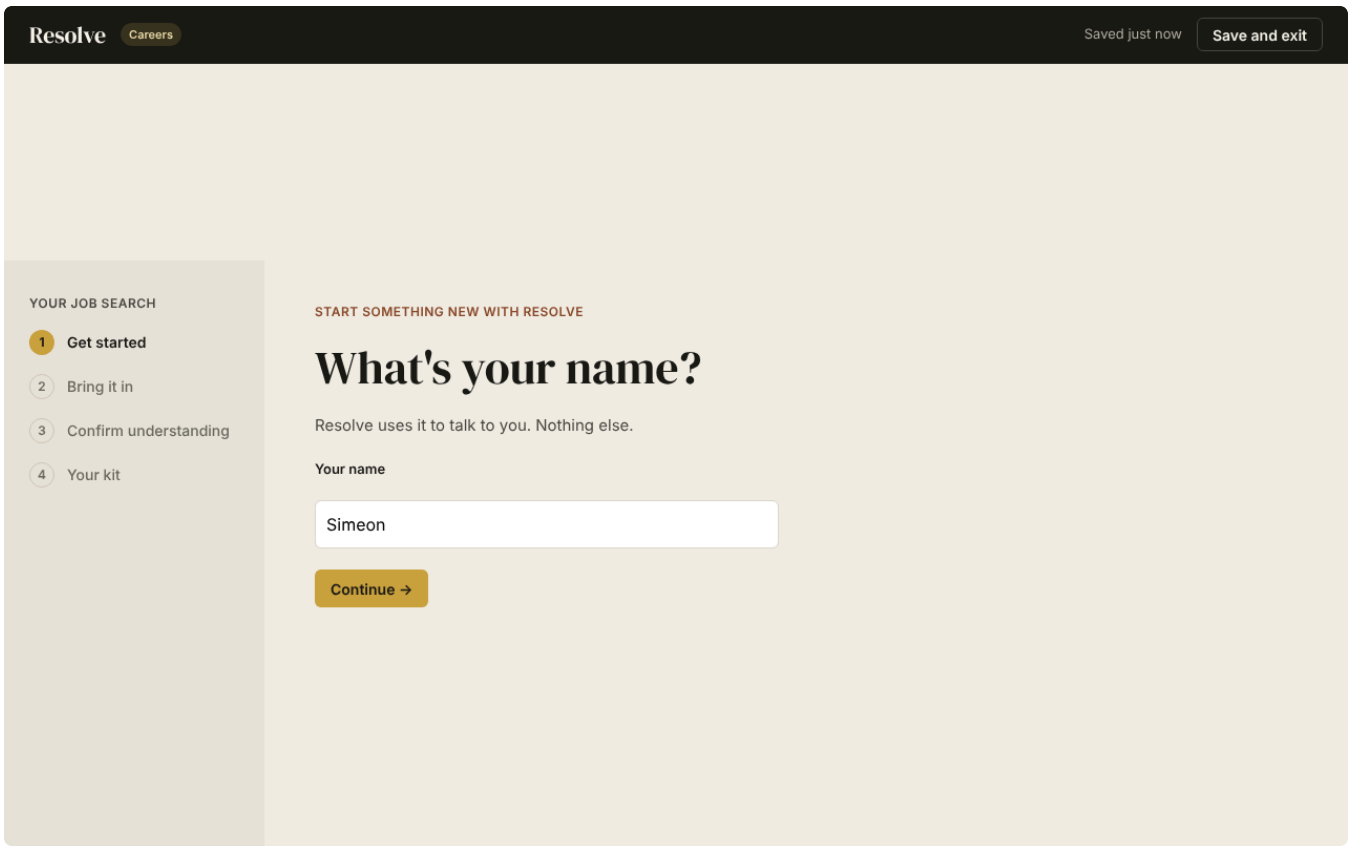


02a Welcome

"What do you need help with?" with four path cards in a 2 by 2 grid. "I have a messy project" (live), "I have a new idea" and "I'm stuck" (Coming soon, dimmed), and the new "I'm looking for a job" (live, New tag). Choosing it runs this flow. On Adopt it creates a Careers workspace, named by the user (default "Job search").

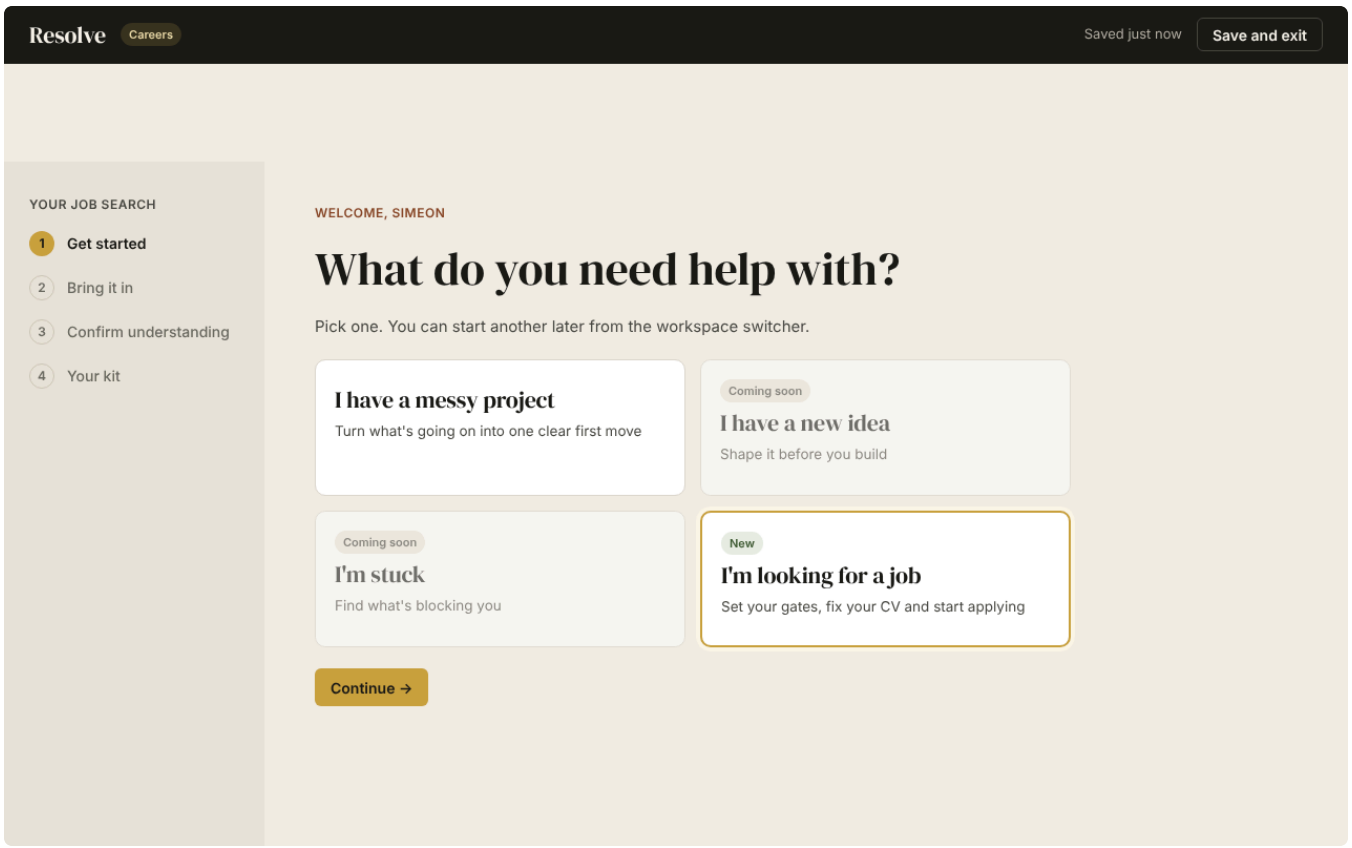


02b Bring it in

- Title: "Tell Resolve what job you're looking for." One box with mic.
- Use a template inserts eight headings: The job I want / The level I'm at and aiming for / Where (location, office days, travel) / The least I'll accept in pay / Companies I want and don't want / What I'm best at / What's gone wrong so far / When I need it by.
- Buttons: Use a template, Try an example, Bring it in from another AI chat.
- Below the box: "Attach your CVs and LinkedIn" (.pdf, .docx, .md, .txt; LinkedIn as its PDF export), using the alpha's attach button. Attached files show as chips.

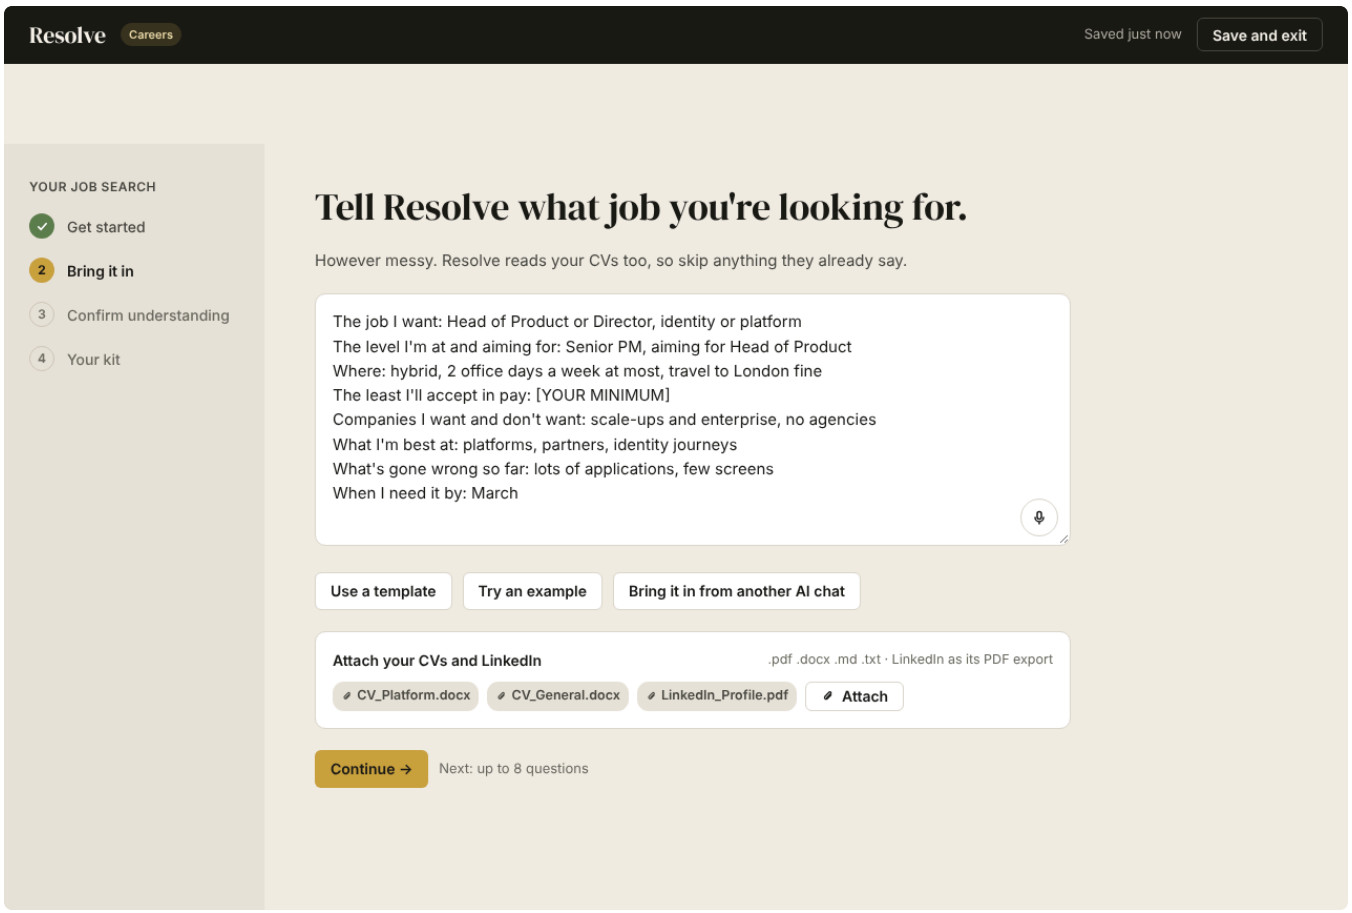


02c Pull-in panel

Same panel as PM with a careers prompt: answer the eight headings from the chat, in the first person, writing "Not covered" where the chat doesn't say. Steps: copy the prompt, paste it into the other chat, paste the answer back.

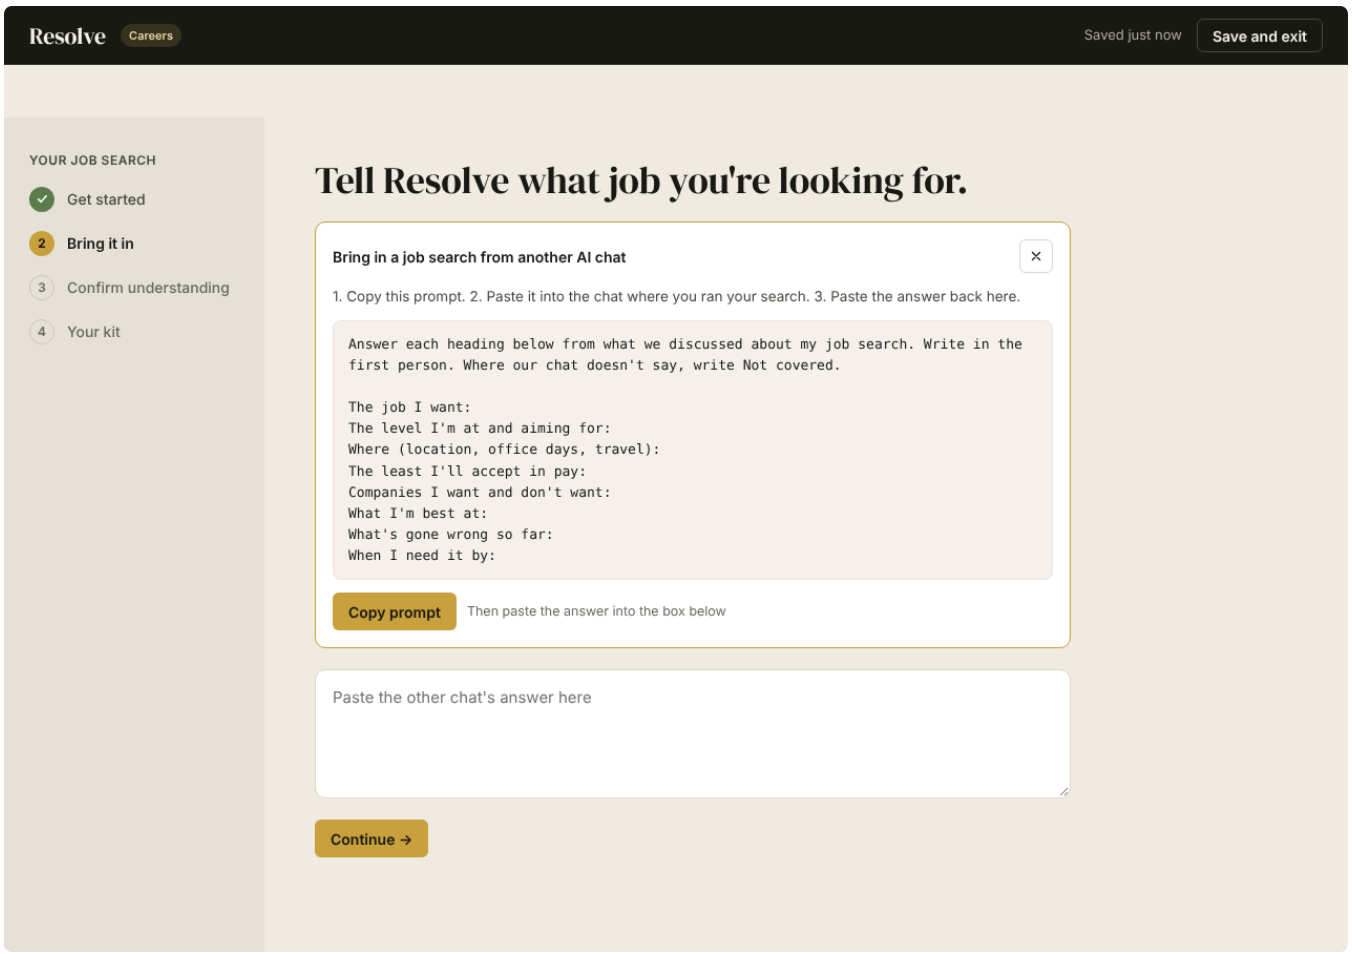


03 Questions


- Careers `TARGETS`: role and level, company type and size, minimum pay, location and office days, travel, contract type, disciplines open to, timeline and weekly hours. Cap 8.
- Skips any target the files or 02b answered, and says how many it skipped.
- A broad answer gets one push: "That covers a lot. Which one first?"
- Heard panel on the right labels each item Hard gate, Preference or Question.

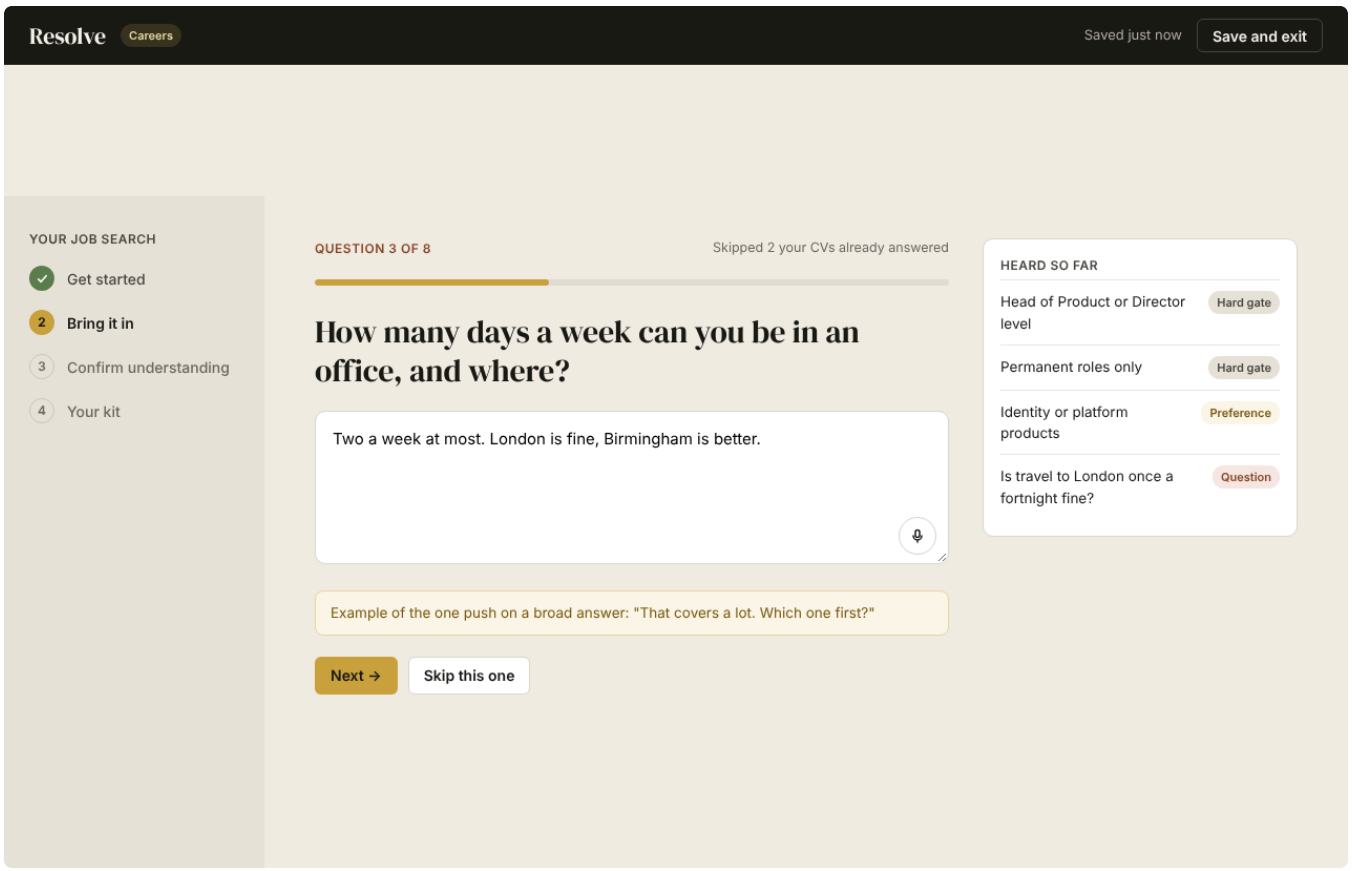

04 Confirm and 04b Edit mode


Five cards: The job you want, Your hard gates, Your preferences, What a win looks like (role, pay, by when), and a full-width Your CV and LinkedIn card with three columns: Strengths, Gaps, What to fix. The CV card has "Rebuild my CV", which opens that part of the proposal editor. Buttons: "That's right →" and Edit. 04b makes every card editable with Save changes and Cancel.

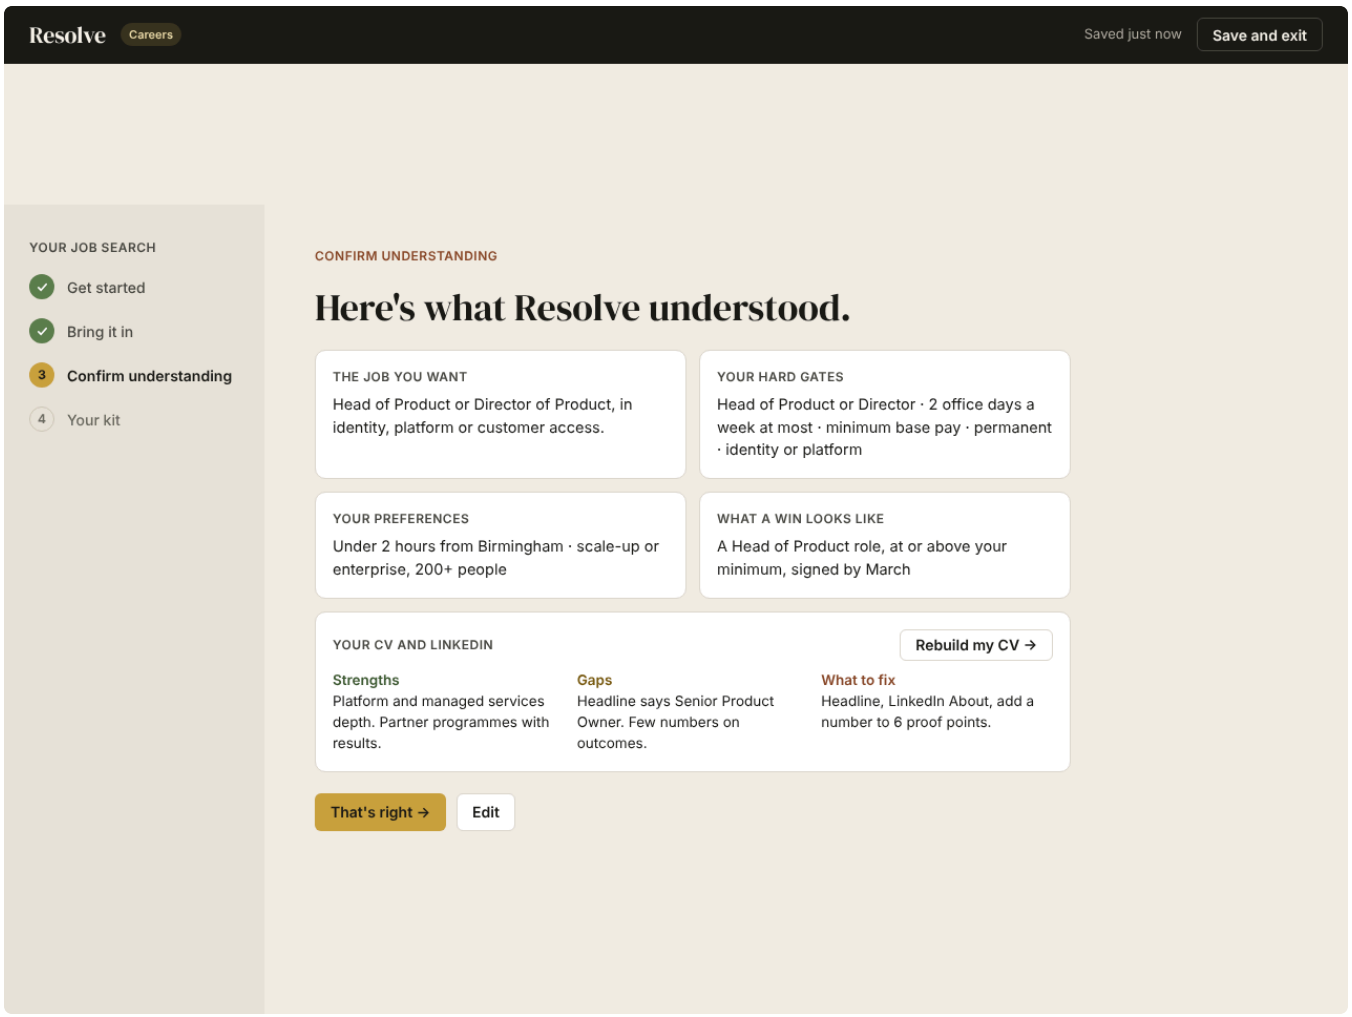
Resolve
Careers
Saved just now
Save and exit
YOUR JOB SEARCH
Get started
Bring it in
3
Confirm understanding
4
Your kit
CONFIRM UNDERSTANDING
Here's what Resolve understood.
THE JOB YOU WANT
Head of Product or Director of Product, in identity, platform or customer access.
YOUR HARD GATES
Head of Product or Director · 2 office days a week at most · minimum base pay · permanent · identity or platform
YOUR PREFERENCES
Under 2 hours from Birmingham · scale-up or enterprise, 200+ people
WHAT A WIN LOOKS LIKE
A Head of Product role, at or above your minimum, signed by March
YOUR CV AND LINKEDIN
Rebuild my CV →
Strengths
Platform and managed services depth. Partner programmes with results.
Gaps
Headline says Senior Product Owner. Few numbers on outcomes.
What to fix
Headline, LinkedIn About, add a number to 6 proof points.
That's right →
Edit

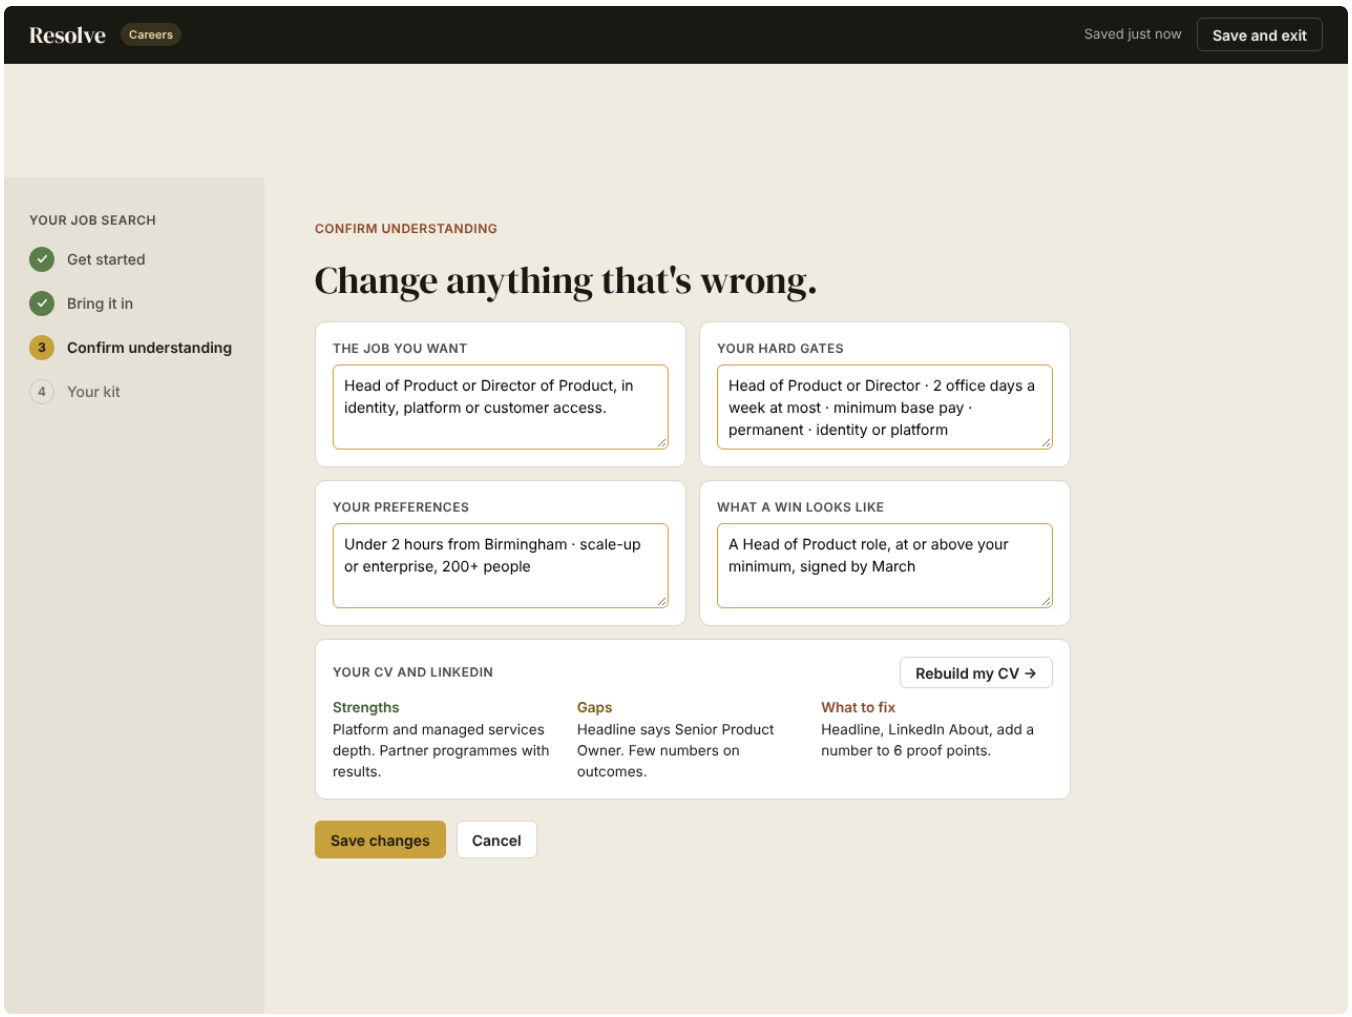


05 No clear outcome

"We're not going to guess." One question: "If Resolve does its job, what job do you have in three months?" Fires when the target is still broad after 03.

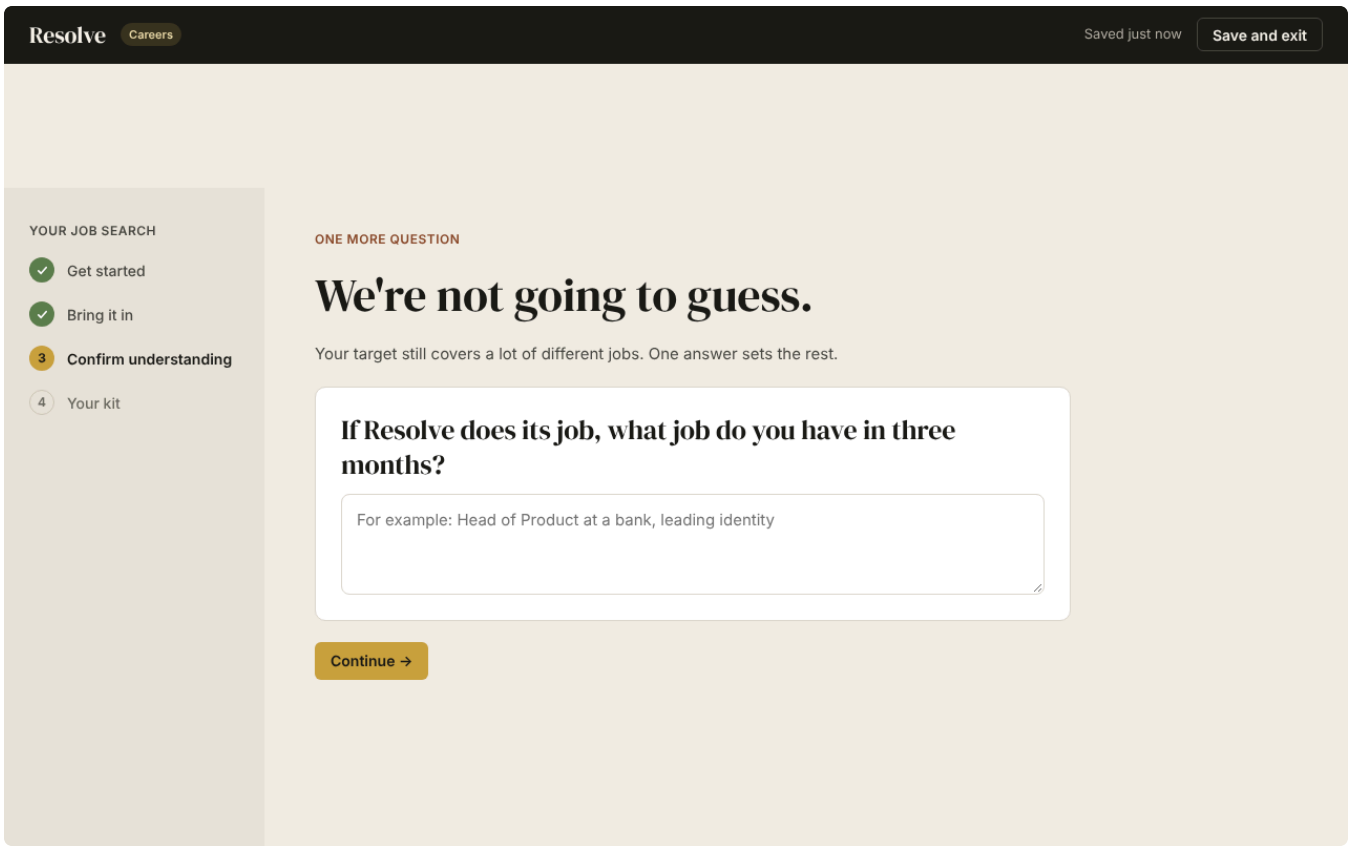


06 Next move

Dark "Do this first" card (for example "Fix your CV headline", with why). The Now / Next / Later strip reads: Get your kit ready / Start applying / Prepare for interviews.

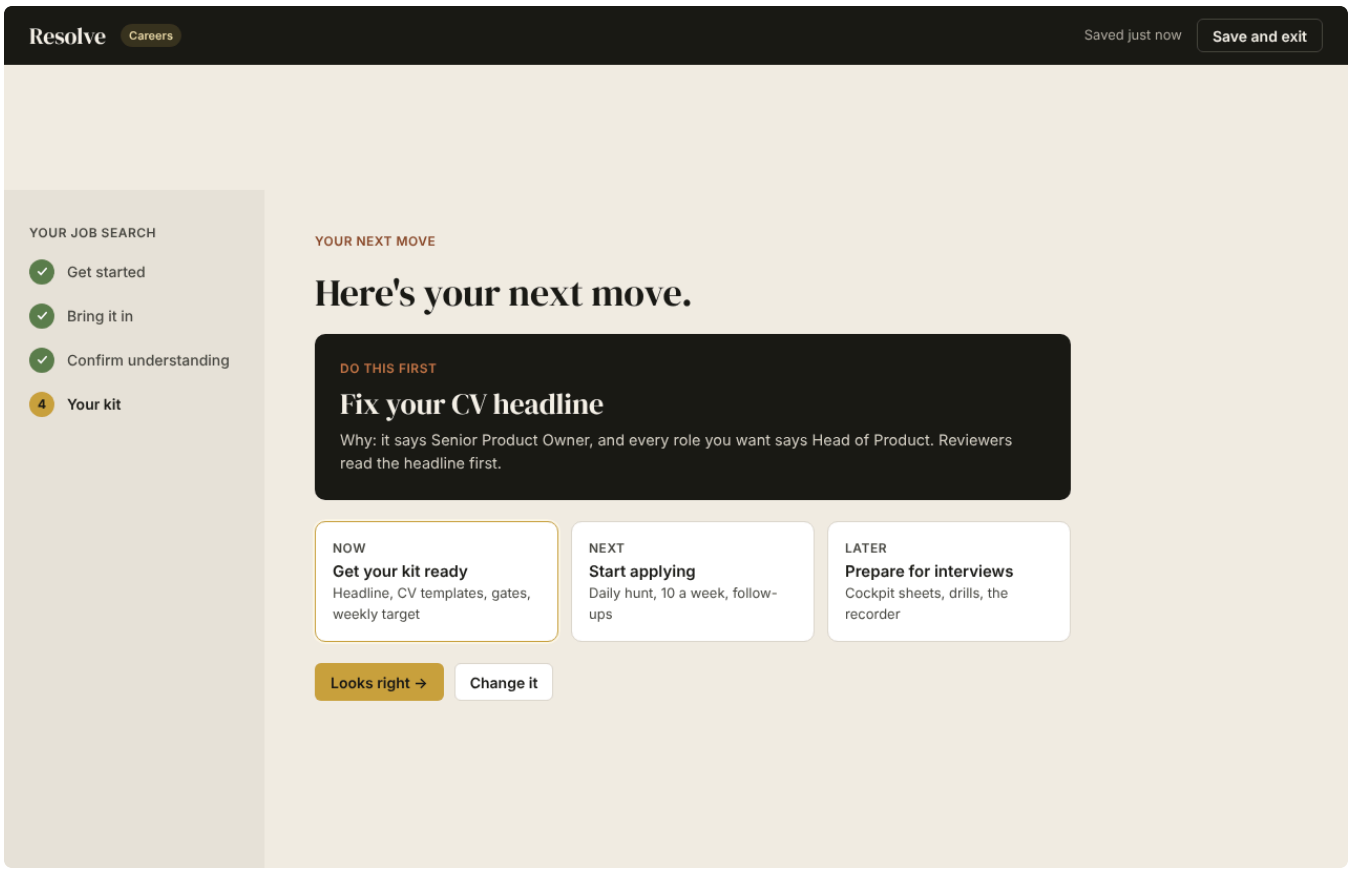


07 Gates

"Is this one of your gates?" One gate card at a time: Hard gate or Preference tag, counter (4 of 7), serif title ("No more than 2 office days a week"), the reason. Buttons: "Yes, keep this gate", "Not quite", and "Make it a preference". The right list, Your gates, fills as the user confirms.

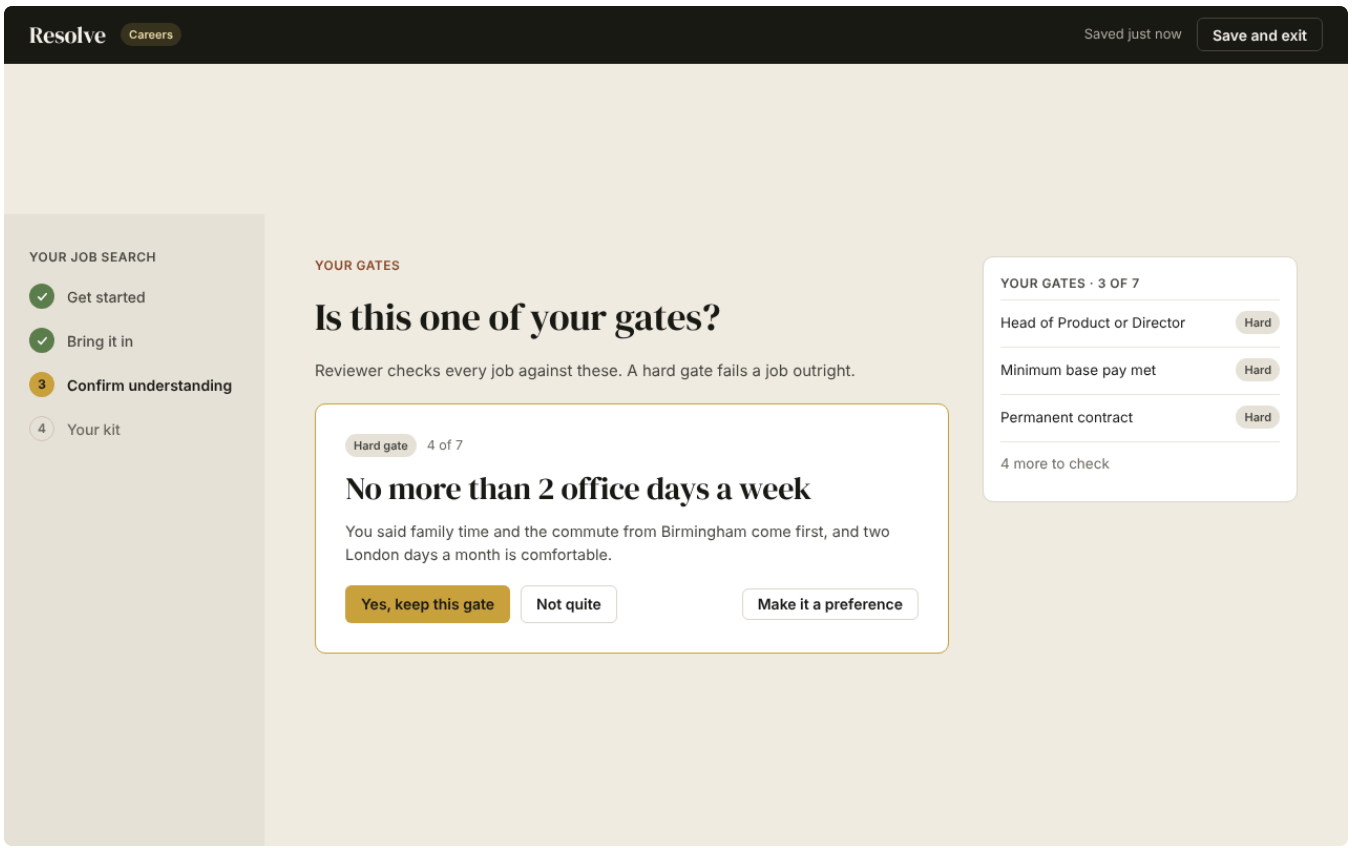


08 First week

"Here's where to begin." Five tasks from the kit with a day each: fix LinkedIn headline, rebuild CV, set the weekly target, first daily hunt, apply to the first three.

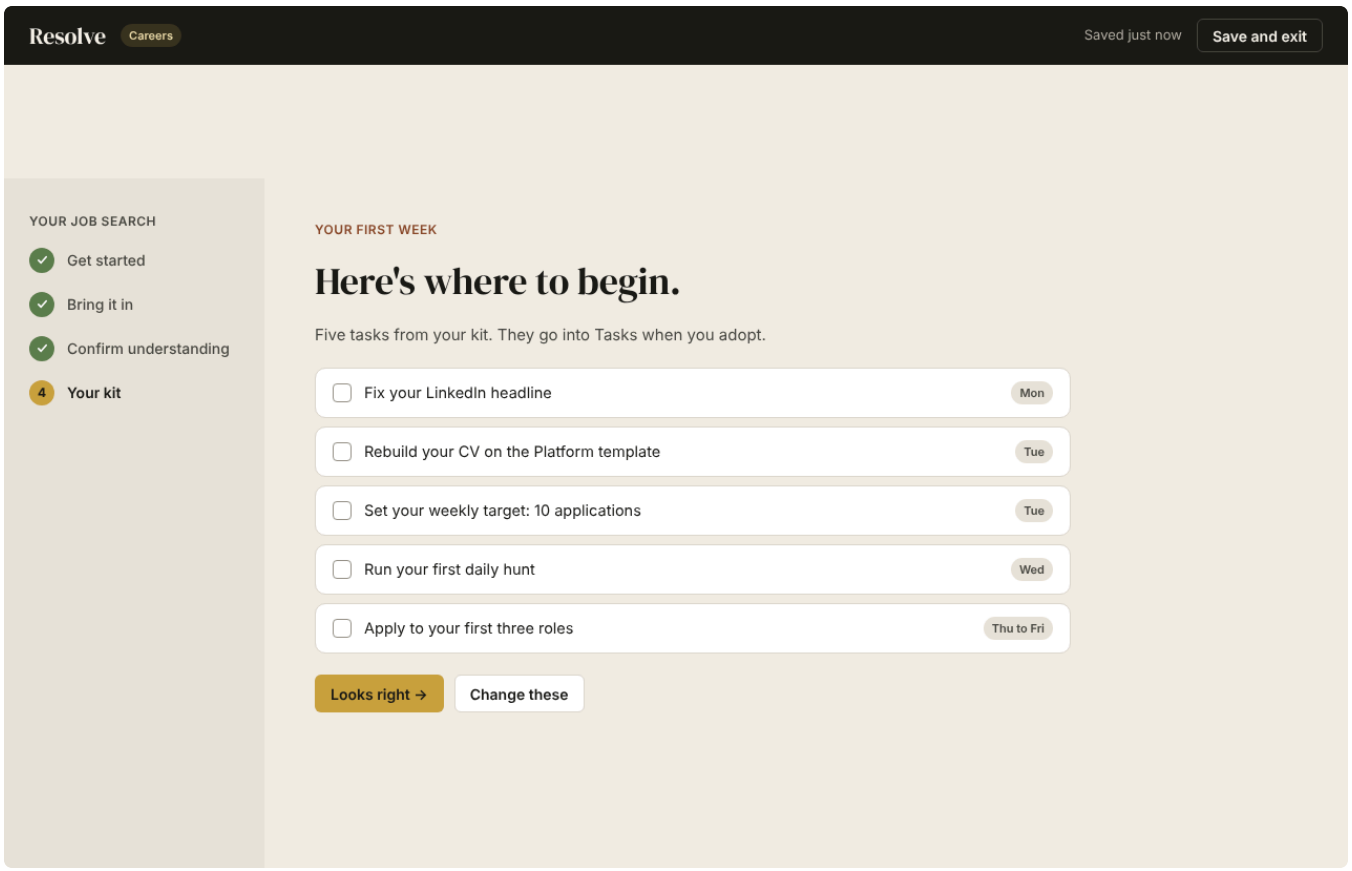


09 Your kit

"Here's your kit." Search name field, then six blocks: Gates, CV templates, Cover letter template, Evidence bank (count of proof points), LinkedIn fixes, Weekly target. Then the Do this first card. Buttons: "Adopt, start my job search →" and "Edit the full proposal →".

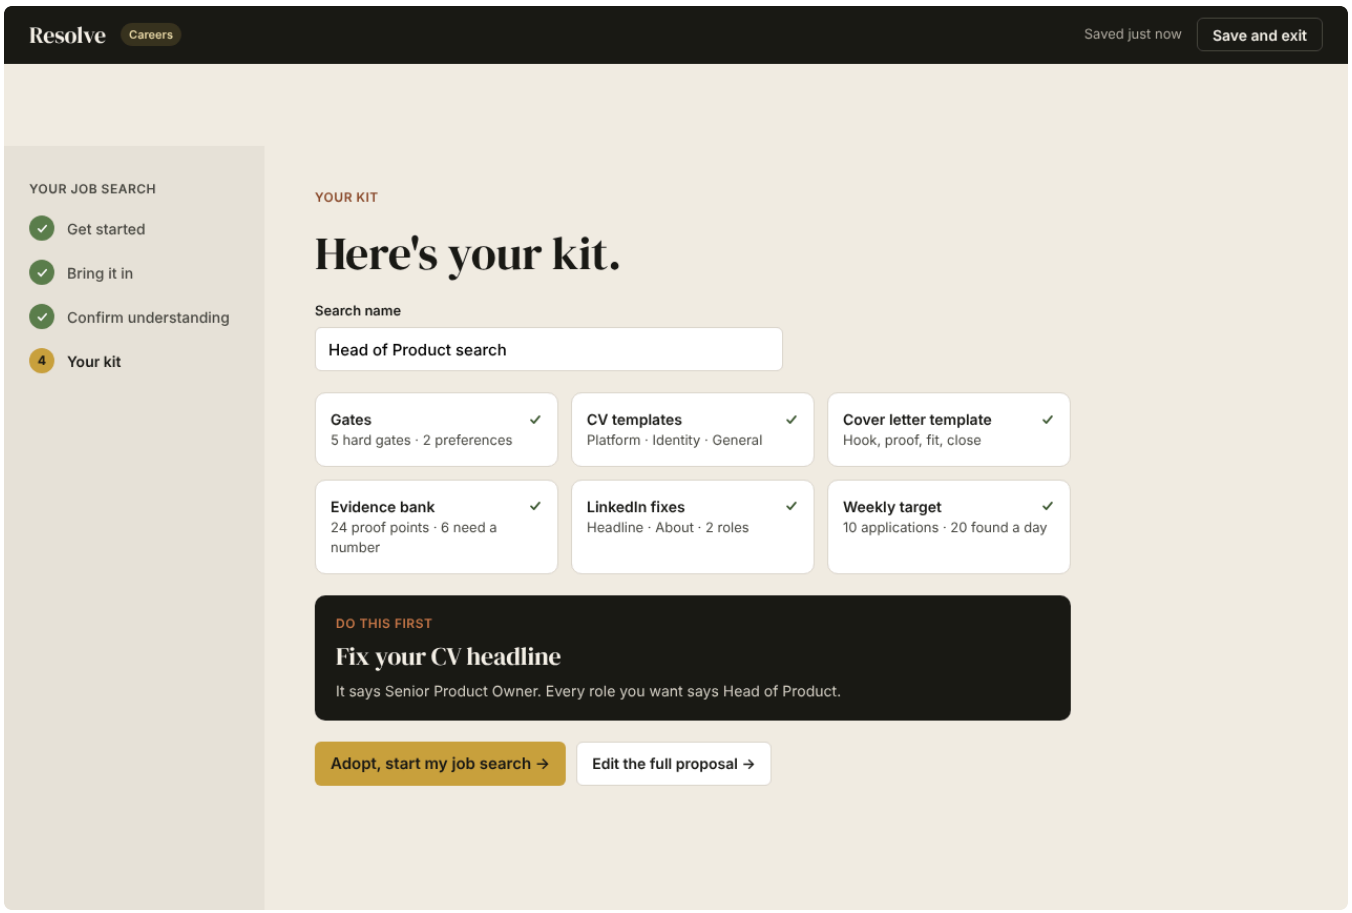


Proposal editor

Left nav: Target, Gates, CV templates, Cover letter, Evidence bank, LinkedIn fixes, First week. The CV templates page lists each template with the roles it suits, a Default tag, Set as default, and an editable headline.

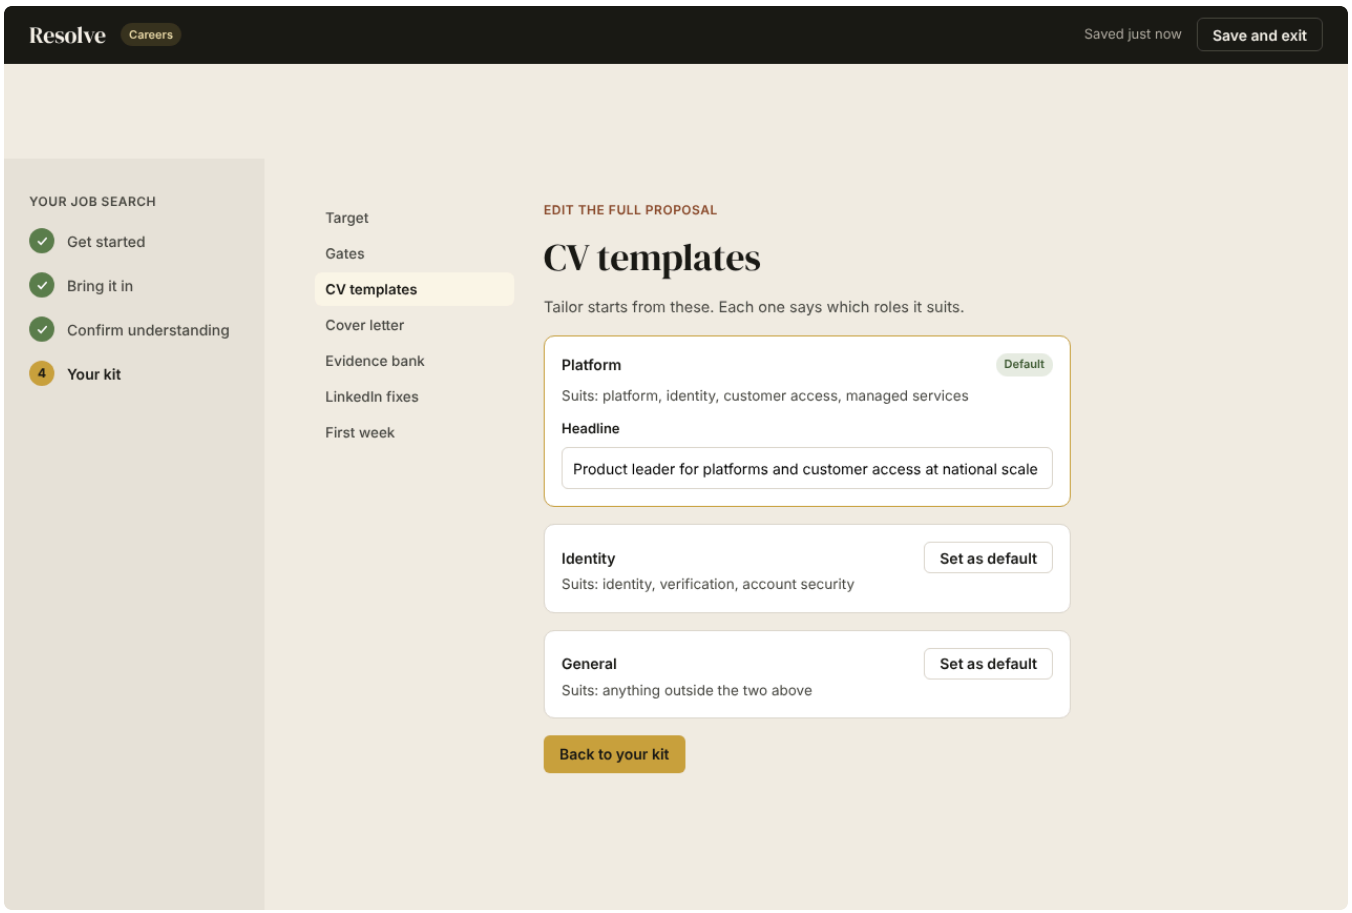


10 Bridge

Build checklist, ticked as each finishes: Creating your job search / Saving your gates / Building your CV and cover letter templates / Starting your evidence bank / Adding your first tasks / Saving the intake transcript.

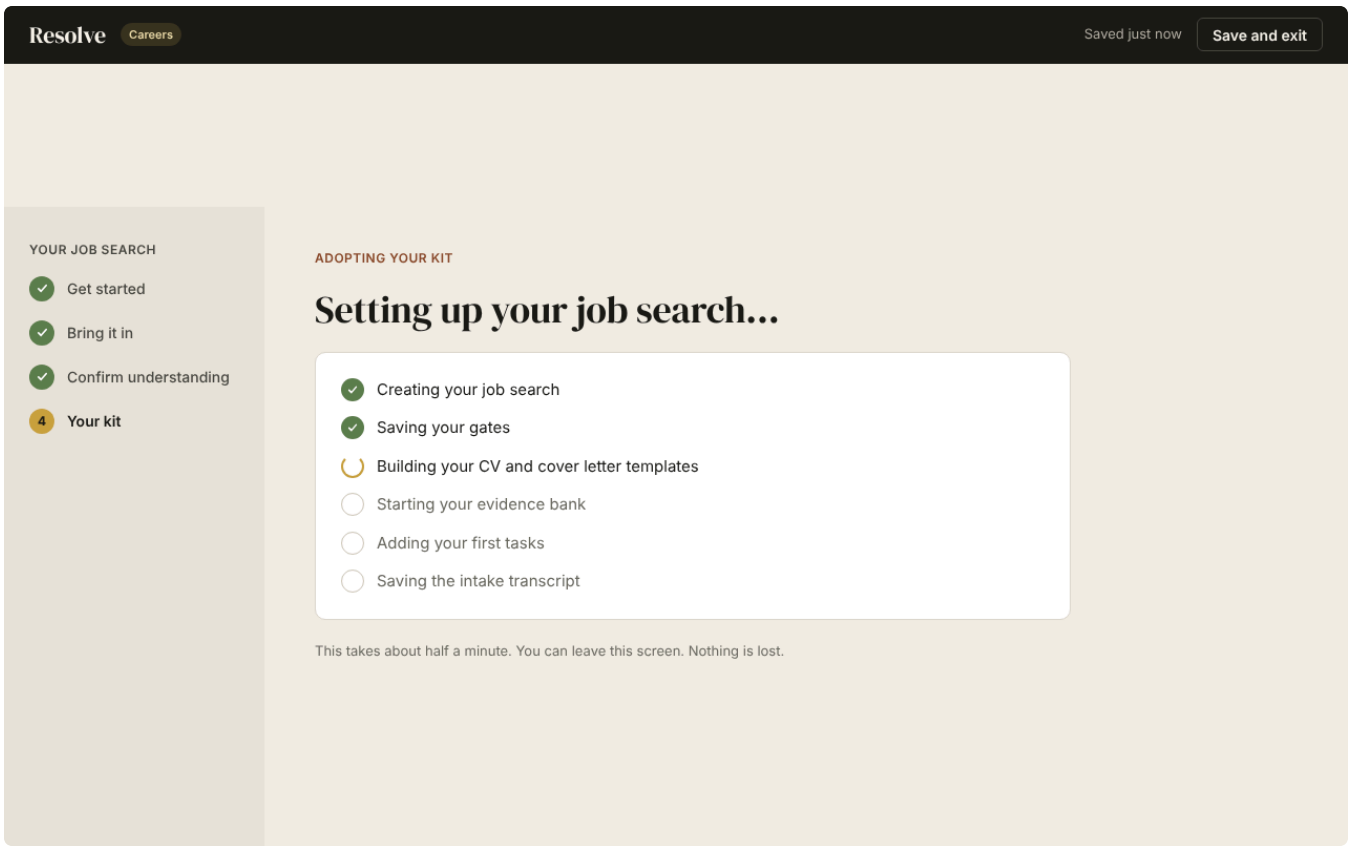


11 Reveal

"Your job search is ready." Three counts: gates, templates, proof points. Do this first card. "Open my job search →" goes to Home.

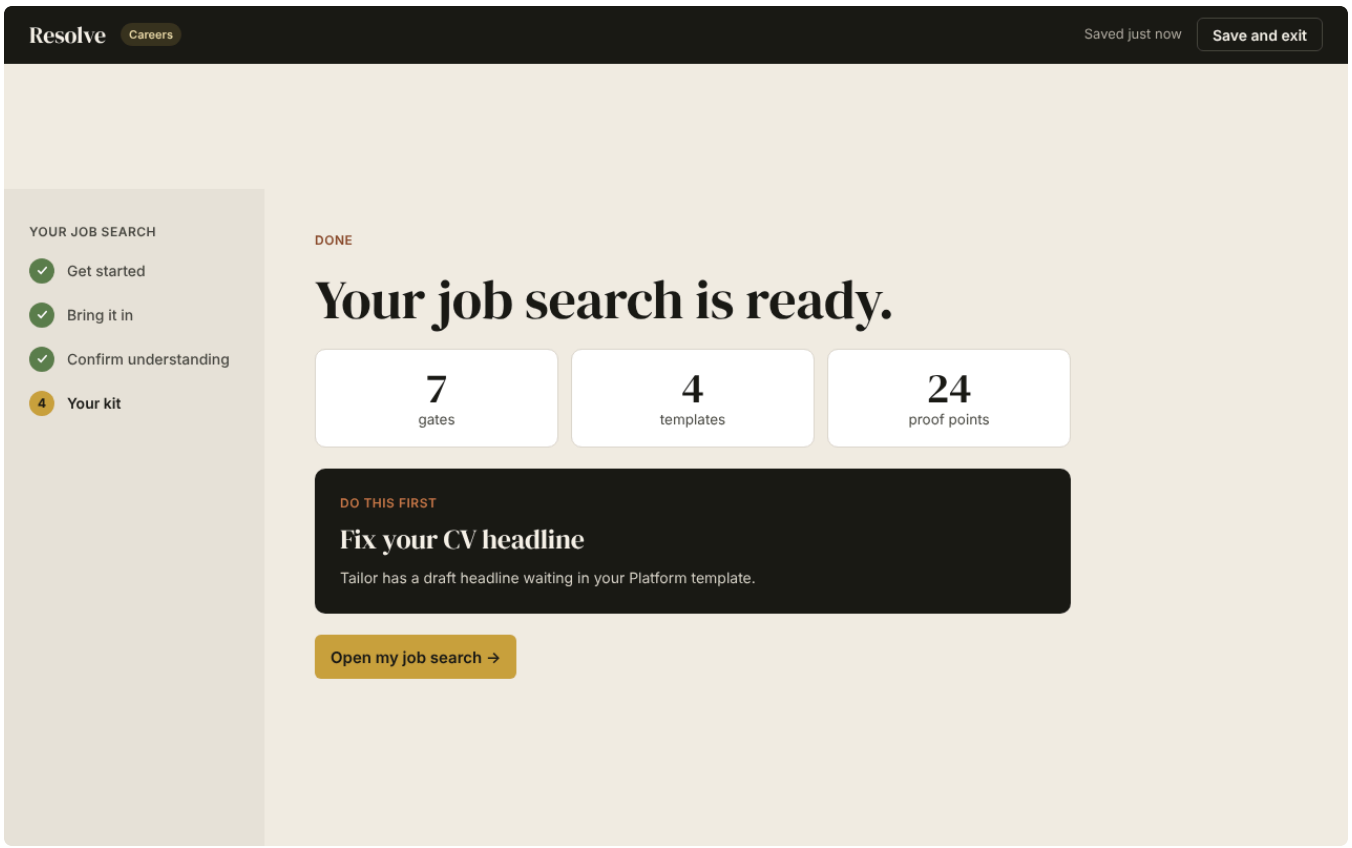

12 AI limit

Same as PM. The canvas copy ("Resolve has reached its AI limit for now.") is a placeholder: use the PM screen's wording.

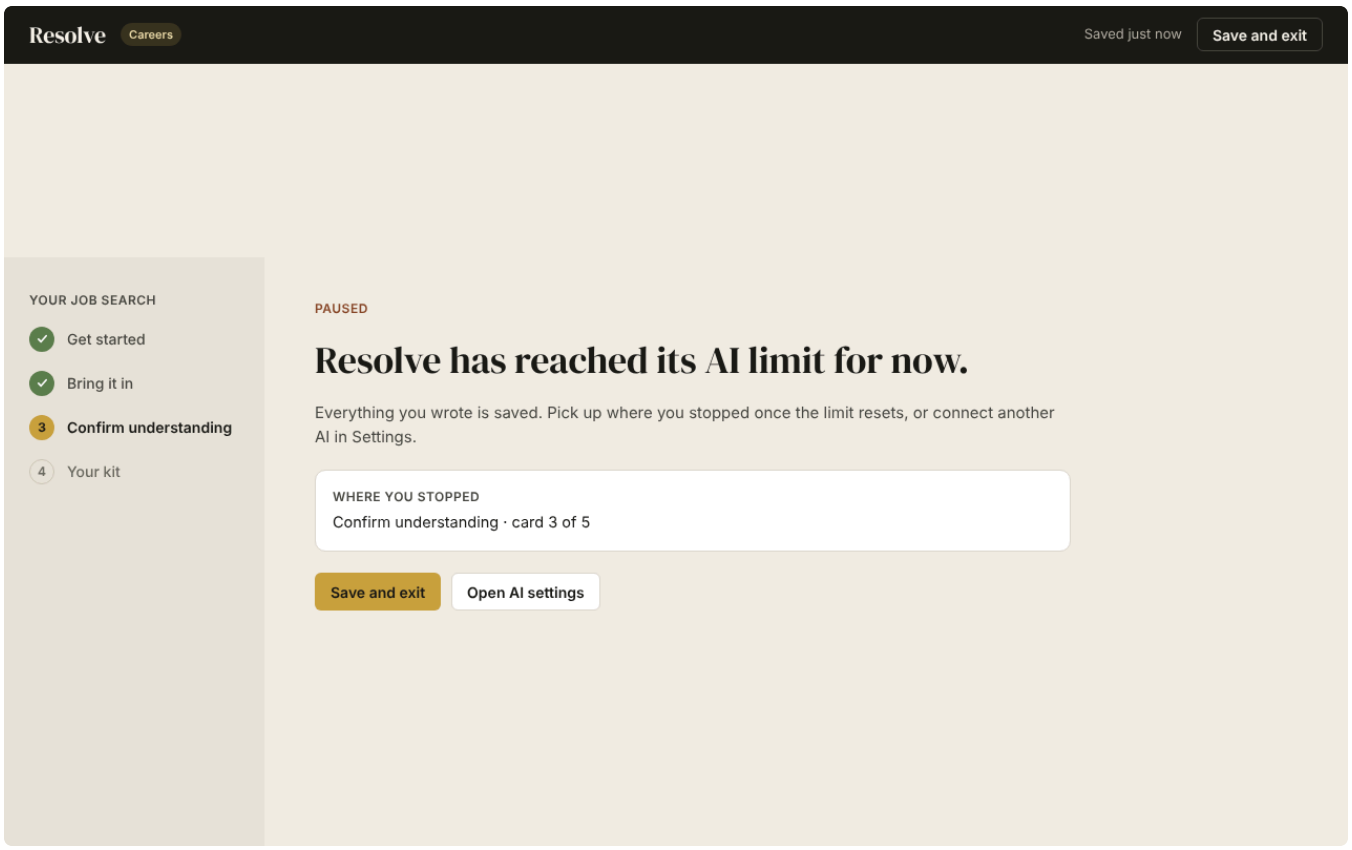


Home

Same layout as the built Home (`dashboard.rs`): greeting and counts line, a left column (Add a job, dark hero, Today), a right column of cards, "+ New project" top right. Each part maps across.

Part	PM mode (built)	Careers mode
Counts line	"Friday 6 November · 3 due today · 1 event"	"Friday 6 November · 4 of 10 applied this week · 1 interview · 2 closing soon"

Part	PM mode (built)	Careers mode
Above the hero (new)	None	Add a job box, full width of the left column: paste text, paste a link, or drop a screenshot. The Reviewer's verdict appears in place: Apply or Skip tag, the reason, the gate that decided. Buttons: Tailor and apply, Save for later, Skip, and "Open in Pipeline →". A shortcut only: the full work opens in the Pipeline record
Dark hero	Your highest-value move, Start this, Plan my day	Same card and buttons. The move comes from the search ("Tailor your CV for the role closing Friday")
Today	Agenda rows, Open calendar	Same. Interviews, closing dates and follow-ups show with their calendar colour bar
Right card 1	SINCE MONDAY	THIS WEEK: applied against target with a bar, today's hunt ("12 of 20 found"), Start my daily hunt
Right card 2	WAITING ON	WAITING TO HEAR BACK: applications with days since applying, oldest first, tag colour by age
Right card 3	PROJECTS	PIPELINE: count per stage, "All →" opens Pipeline
Right card 4	CAPTURED, Sort	NEW FROM SCOUT: sourced roles waiting for keep or skip, Review. Below it, NEEDS A CHECK: tracker changes it wasn't sure about, with a yes and a no button
+ New project	Opens the intake	Opens the Careers intake (a second search)


States: empty shows the first move from the intake and the Add a job box. Loading and error follow the built Home: an AI failure stays inside its own card. See the states section.

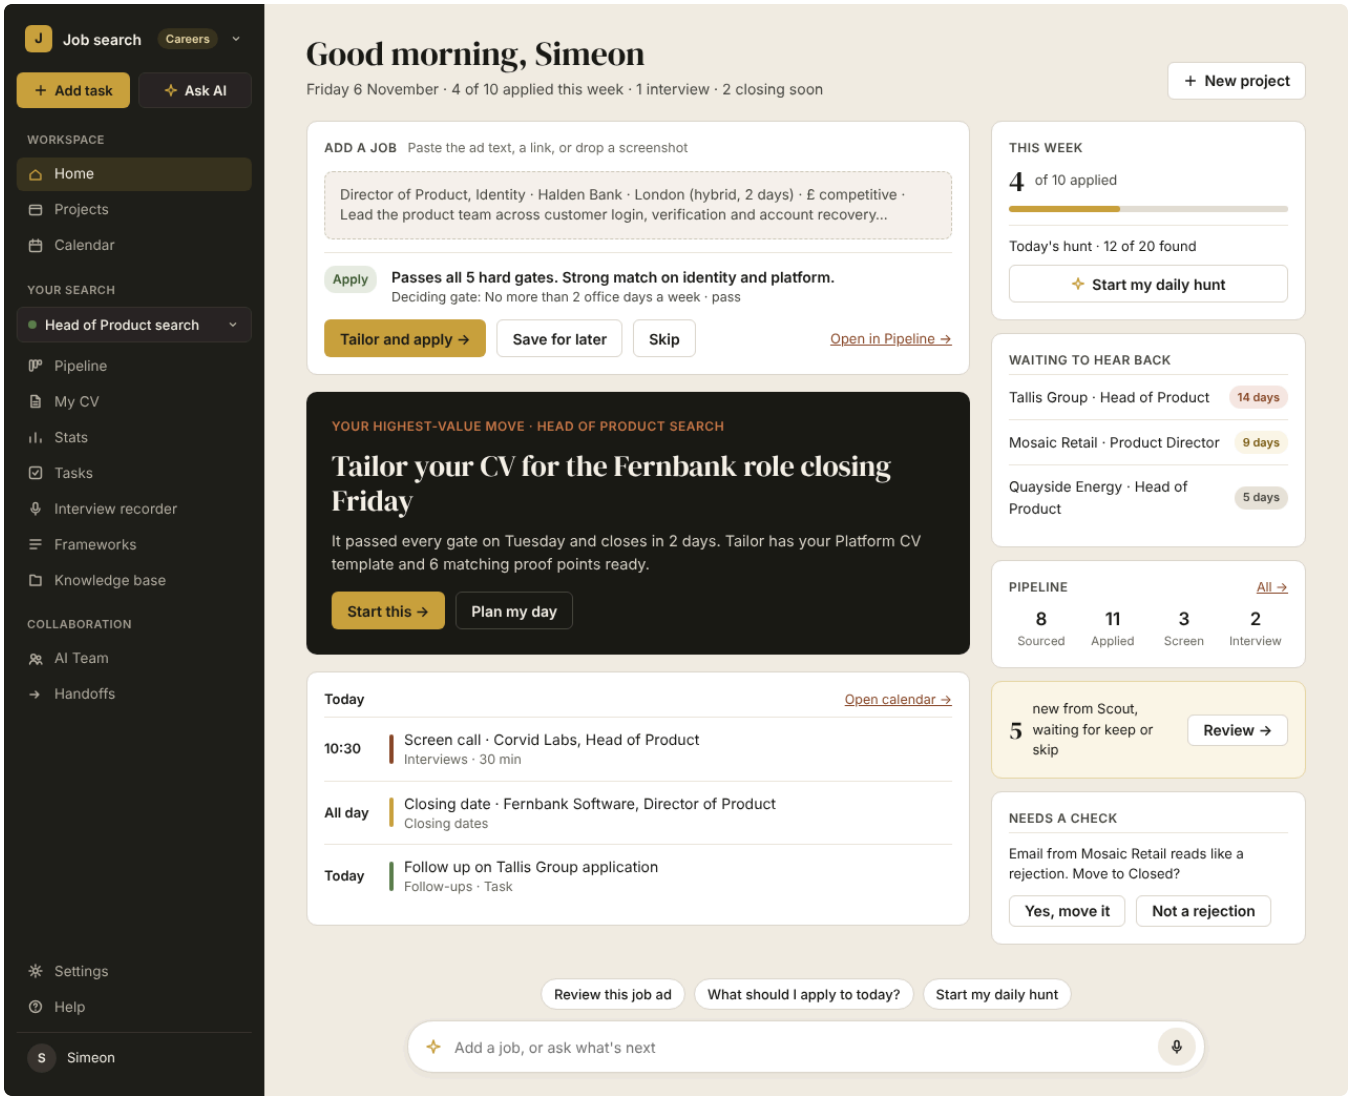

Projects

Projects keeps the built layout, a grid of cards. Each search is a card, and a card opens that search's Pipeline.

- Card contents, top to bottom: serif search name, target line, "Next move · …" (Next move in terracotta), applied this week against target with a bar, a stage count strip (Sourced, Applied, Screen, Interview, Offer), "Updated …".
- The dashed last card reads "+ New search" and "Opens the intake."

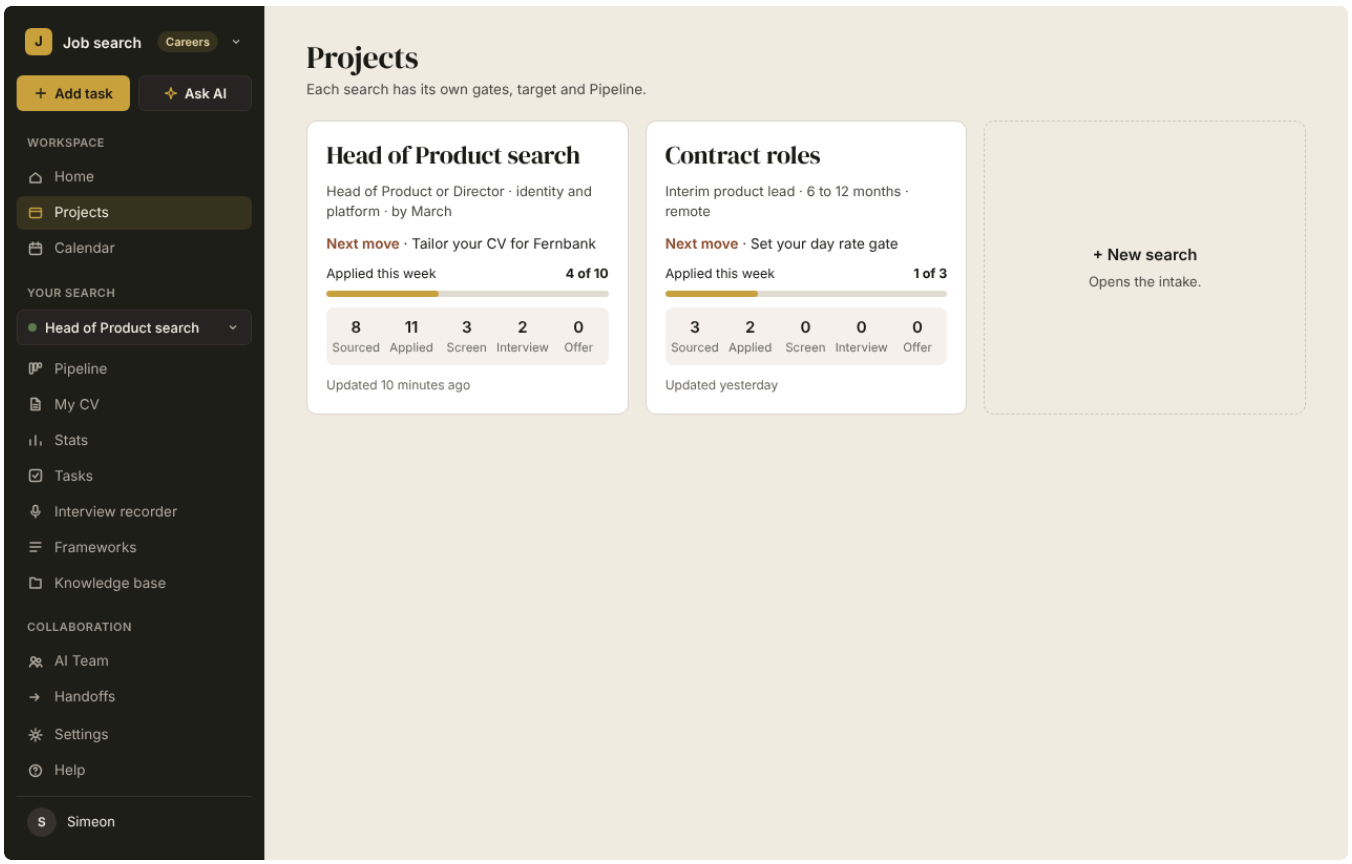


Pipeline

Pipeline is a new item in YOUR SEARCH. It reuses the built Tasks board (`tasks.rs`): List / Board toggle, columns with counts, draggable cards, Undo on every move.


Board

1. Header: eyebrow (search name), title "Pipeline", "✦ Start my daily hunt" and "+ Add a job" (same input as Home).
2. Toolbar: List / Board toggle, then tabs "Open · n" and "Closed · n", then the hint "Drag a card to move it. Every move undoes from the toast."
3. Columns, in order: Sourced, Triaged, Applied, Screen, Interview, Final, Offer. Columns are 212 wide and scroll sideways. An empty column shows "Nothing here yet" in a dashed box.
4. Card: company (bold), verdict tag (Apply or Skip), role, days in stage, closing date tag if within 7 days, and "Next: …" under a divider. Clicking a card opens the record.
5. A tracker move shows a dark toast: "Tracker moved Corvid Labs to Screen · from Gmail invite" with Undo.

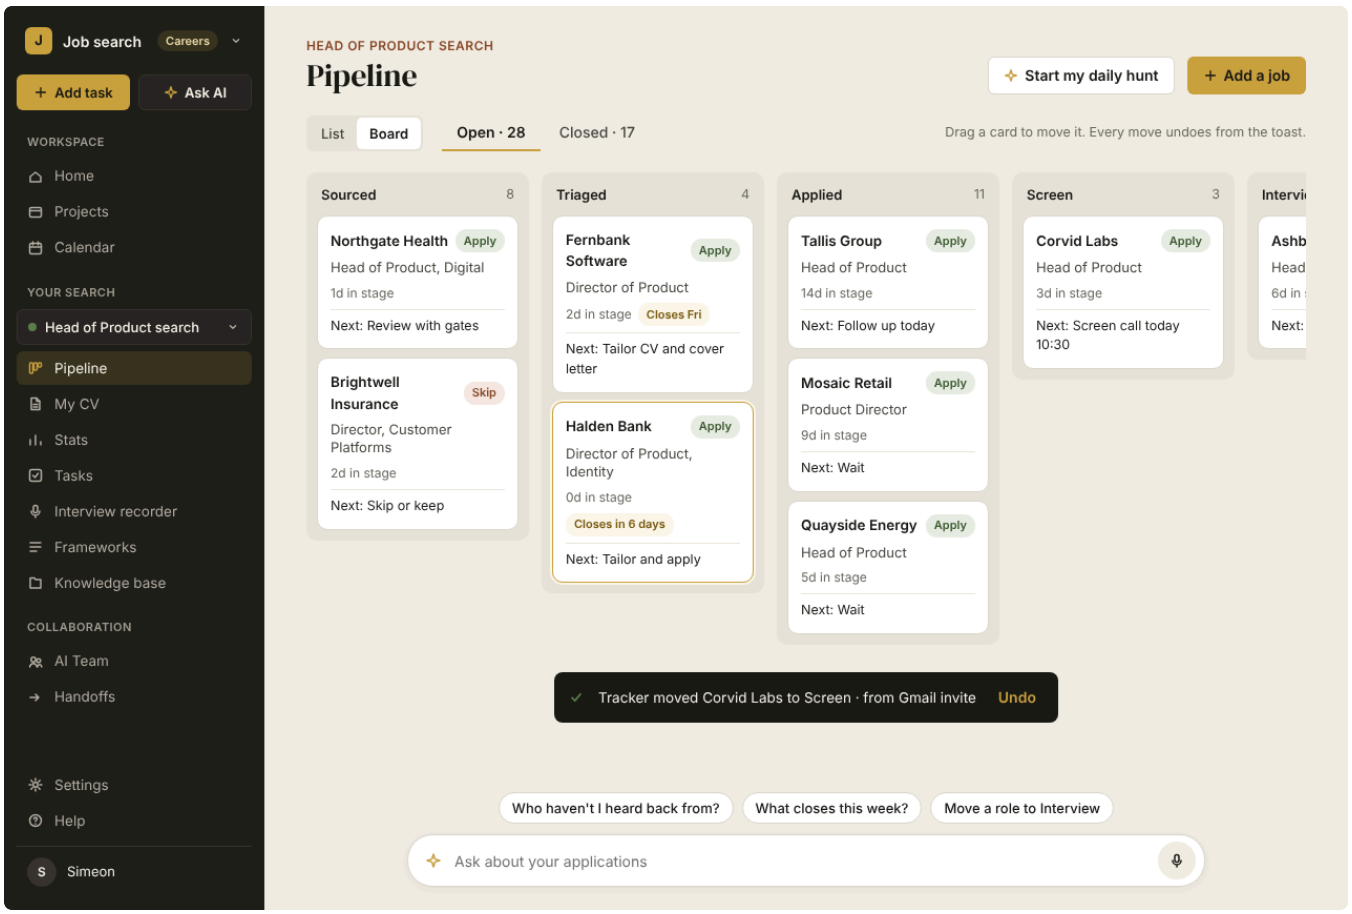


List

Same data as a table: Company, Role, Stage, Verdict, In stage, Next action, Closes. The table scrolls sideways when narrow.

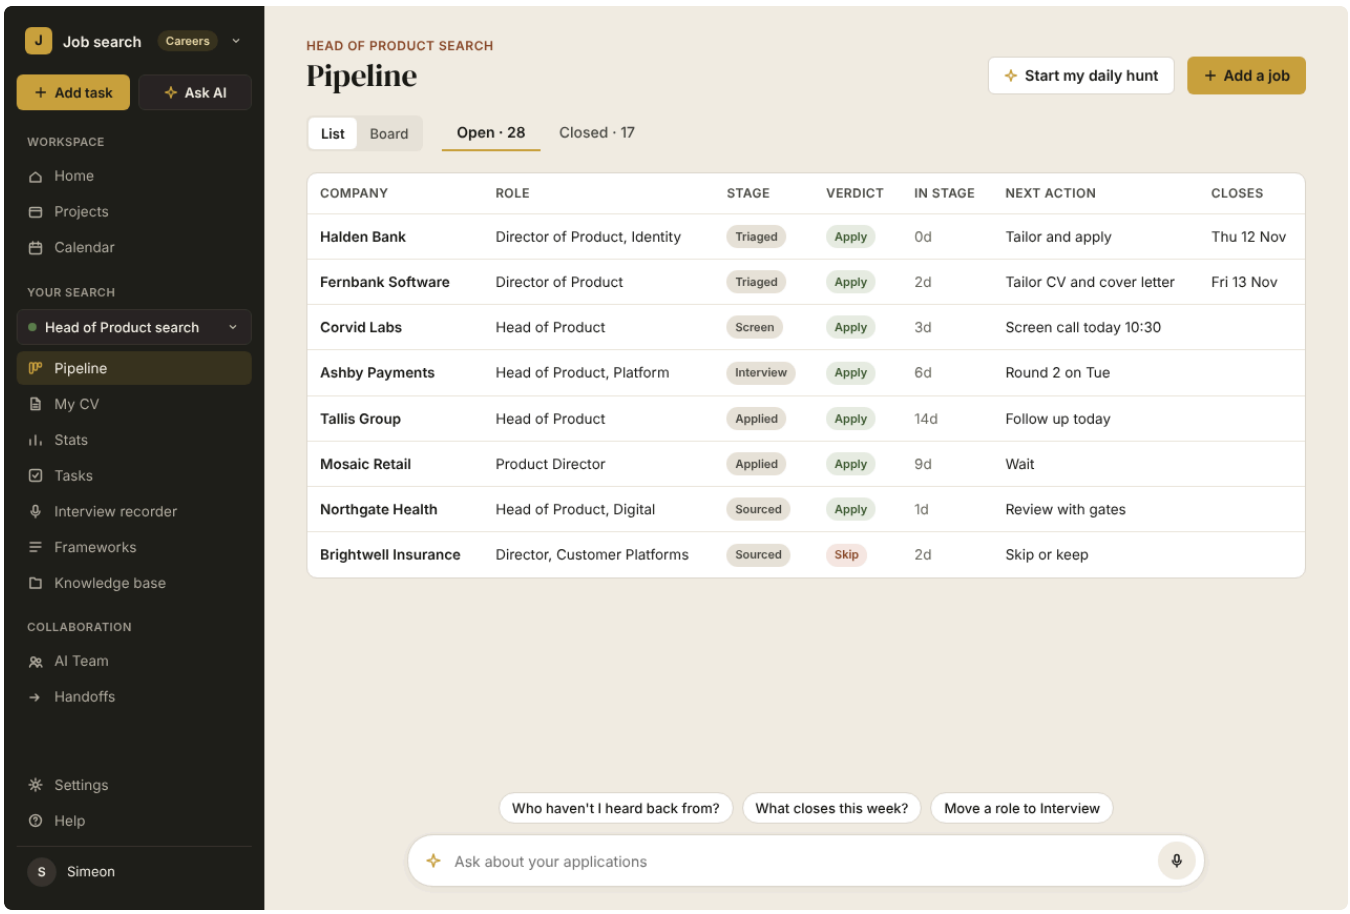

Closed tab

Holds Rejected, Withdrawn and Skipped, with filter chips and counts. A rejection keeps the stage it happened at ("at Applied"), so Stats can show where the user drops off.

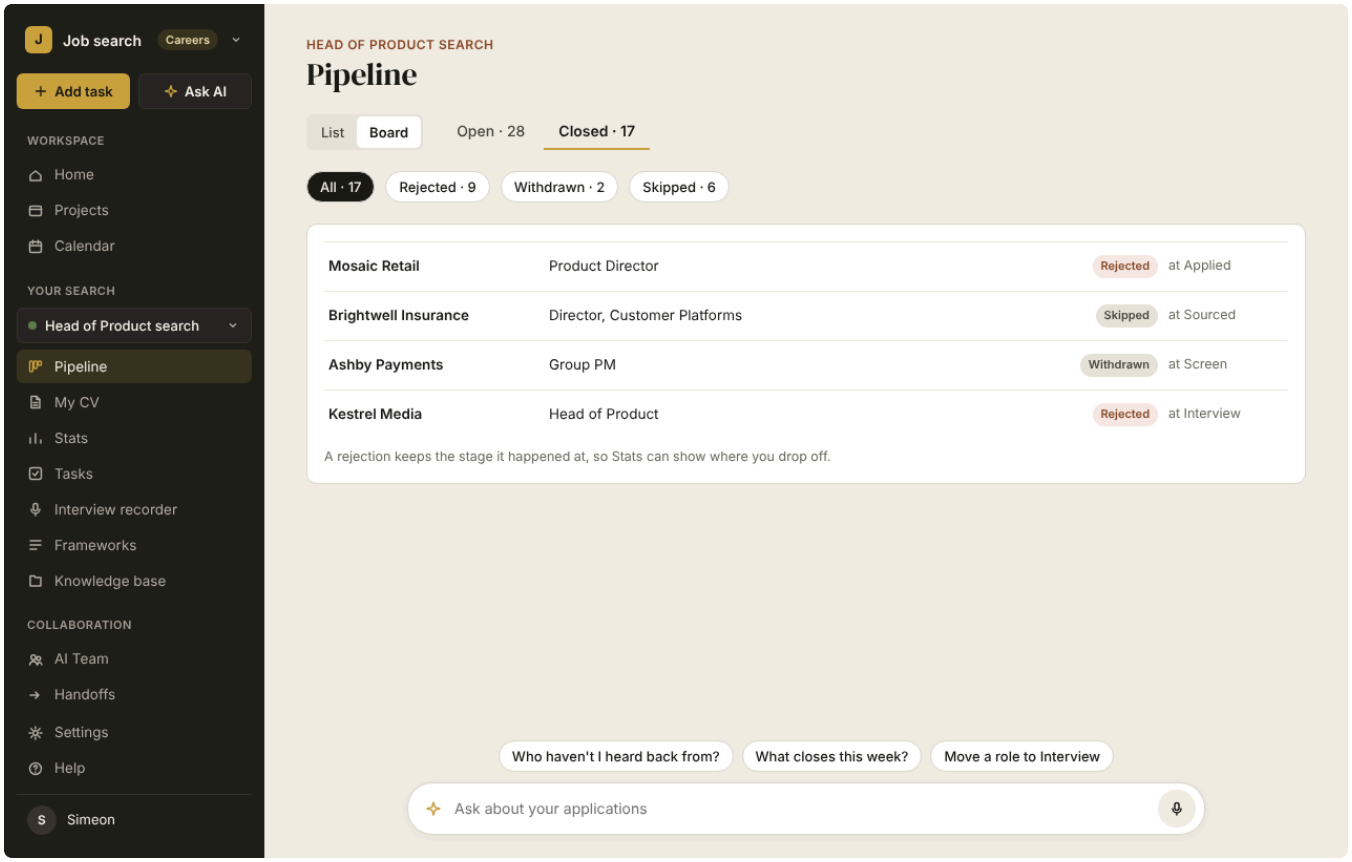


Record

Opens as a page with a right rail, in the page editor layout (`pages.rs`): text 720 wide, rail 250. Top to bottom:

1. Breadcrumb: Pipeline / company.
2. Header: company eyebrow, serif role title, stage tag, source, link to the original ad, closing date.
3. The job ad: saved text or screenshot, "kept if the ad goes offline".
4. Verdict: Apply or Skip tag, then one row per gate with pass or fail mark, Hard gate or Preference tag, and Pass or Fail.
5. Documents: CV and cover letter cards with file name (Name_Role_Company_YYYY-MM), template, sent state, and "Tailor CV and cover letter" when missing.
6. Timeline: stage changes and emails, each with date, source and Undo.
7. People, Interviews (each round, prep sheet, recorder analysis), Offer and outcome, Notes.

Right rail: Stage selector, Next action with its main button, Linked tasks.

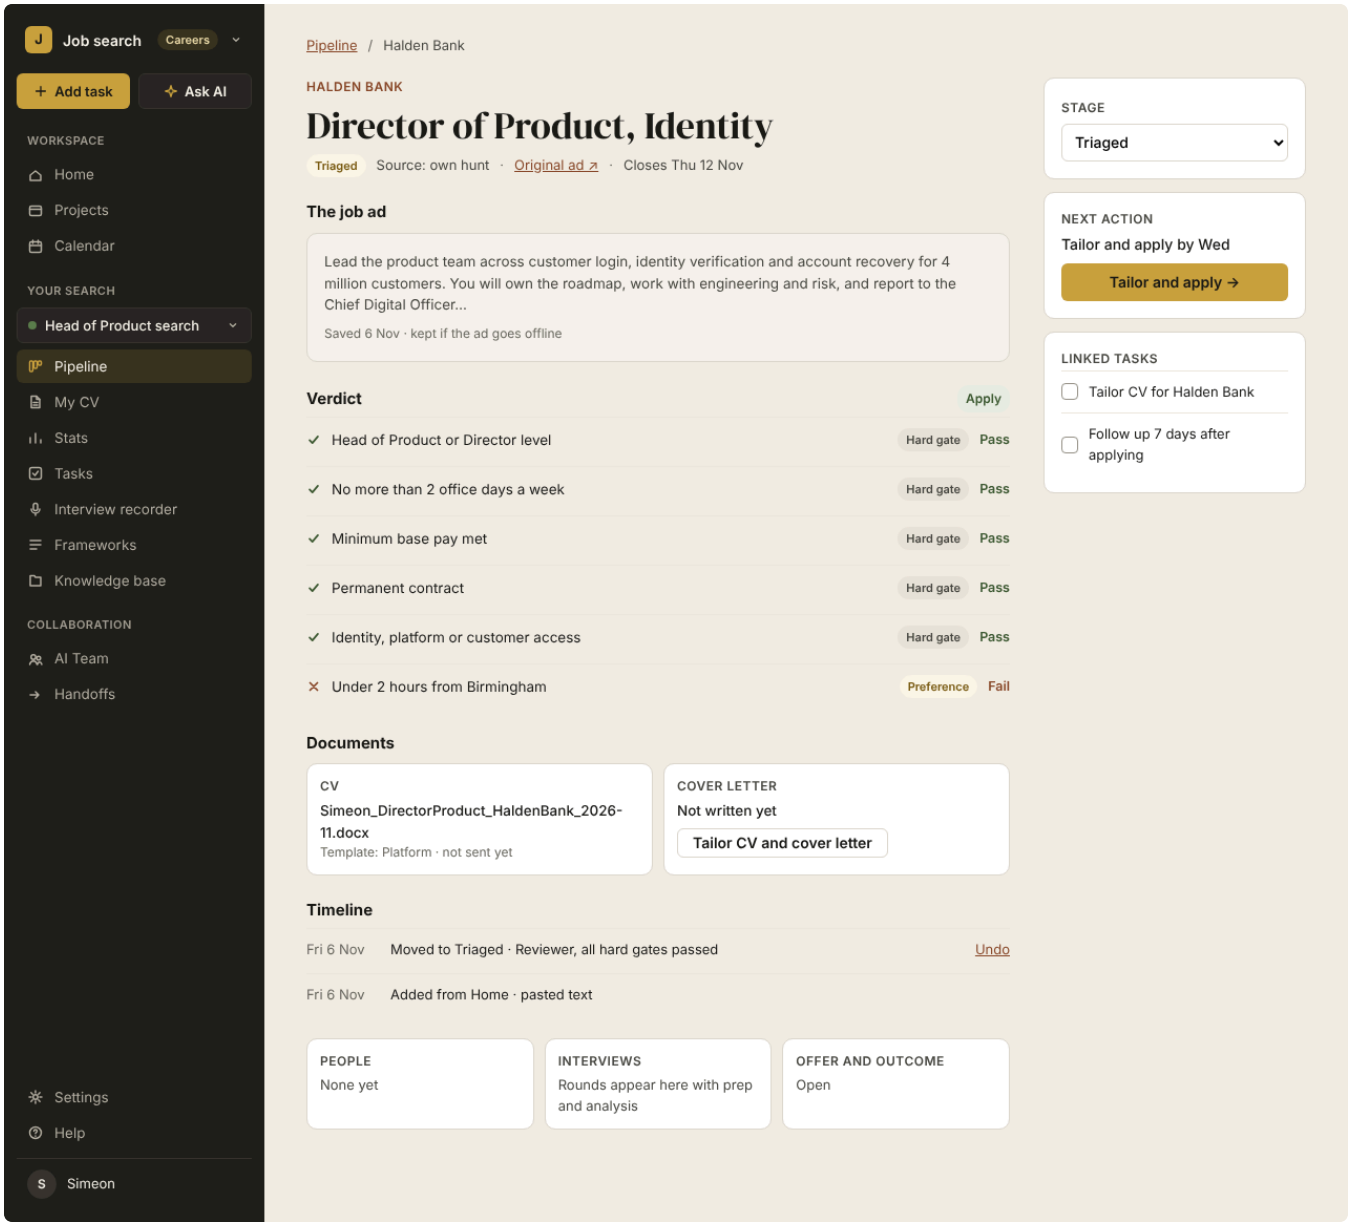

The tracker

The tracker runs in the background, not as an AI Team role. It logs on apply, reads Gmail for confirmations, replies, rejections and invites, moves stages and adds interviews to Calendar. Every automatic change shows in the record's timeline with its source and an Undo toast. Changes it isn't sure about go to Home's NEEDS A CHECK.

My CV


My CV is a new item in YOUR SEARCH, between Pipeline and Stats. It is added after the 10 Nov design brief, so the brief's sidebar, Ask and Help tables need it too. It is the one place to see the master CV, how it scores against the target, the templates Tailor builds from,

LinkedIn progress and every version sent.

1. Header: eyebrow, title "My CV", line "Your master CV, the templates Tailor builds from, and every version you've sent." Actions: "Upload a new CV" and "✦ Rebuild with Tailor" (primary).
2. Tabs: Overview, Templates, Sent versions, LinkedIn. Overview is drawn. The other three are full-page versions of the matching Overview card.
3. Left column (up to 560 wide): "Master CV" label, file name and updated date, Open. Below it a page preview of the CV, with numbered fix markers placed on the lines each fix refers to.
4. Right column, top: dark card "CV check · against your target". Verdict as the serif title ("Strong, with 4 fixes"), an amber count of what to do first, then one paragraph of strengths, gaps and the target it was checked against.
5. What to fix: numbered rows, each with a title, one line of why, and an action button (Fix now, Add numbers, See advice). Numbers match the markers on the preview. Tag colour shows urgency.
6. Templates card: each template with the roles it suits and a Default tag, "All →" opens the Templates tab.
7. LinkedIn card: fixes done against total with a bar, and the next fix.
8. Sent versions: file name (Name_Role_Company_YYYY-MM), template, company linked to its Pipeline record, stage tag.

Where the data comes from: the CV check is the one from intake 04 and is re-run when the master CV changes or the target changes. Fix now opens Tailor with that fix. Proof points without a number come from the evidence bank.

Overlap to know about: CV templates also appear in Frameworks, and CV files in the Knowledge base's "CVs and cover letters" tab. The design keeps both as they are. The data is shared, so an edit in one place shows in all three.

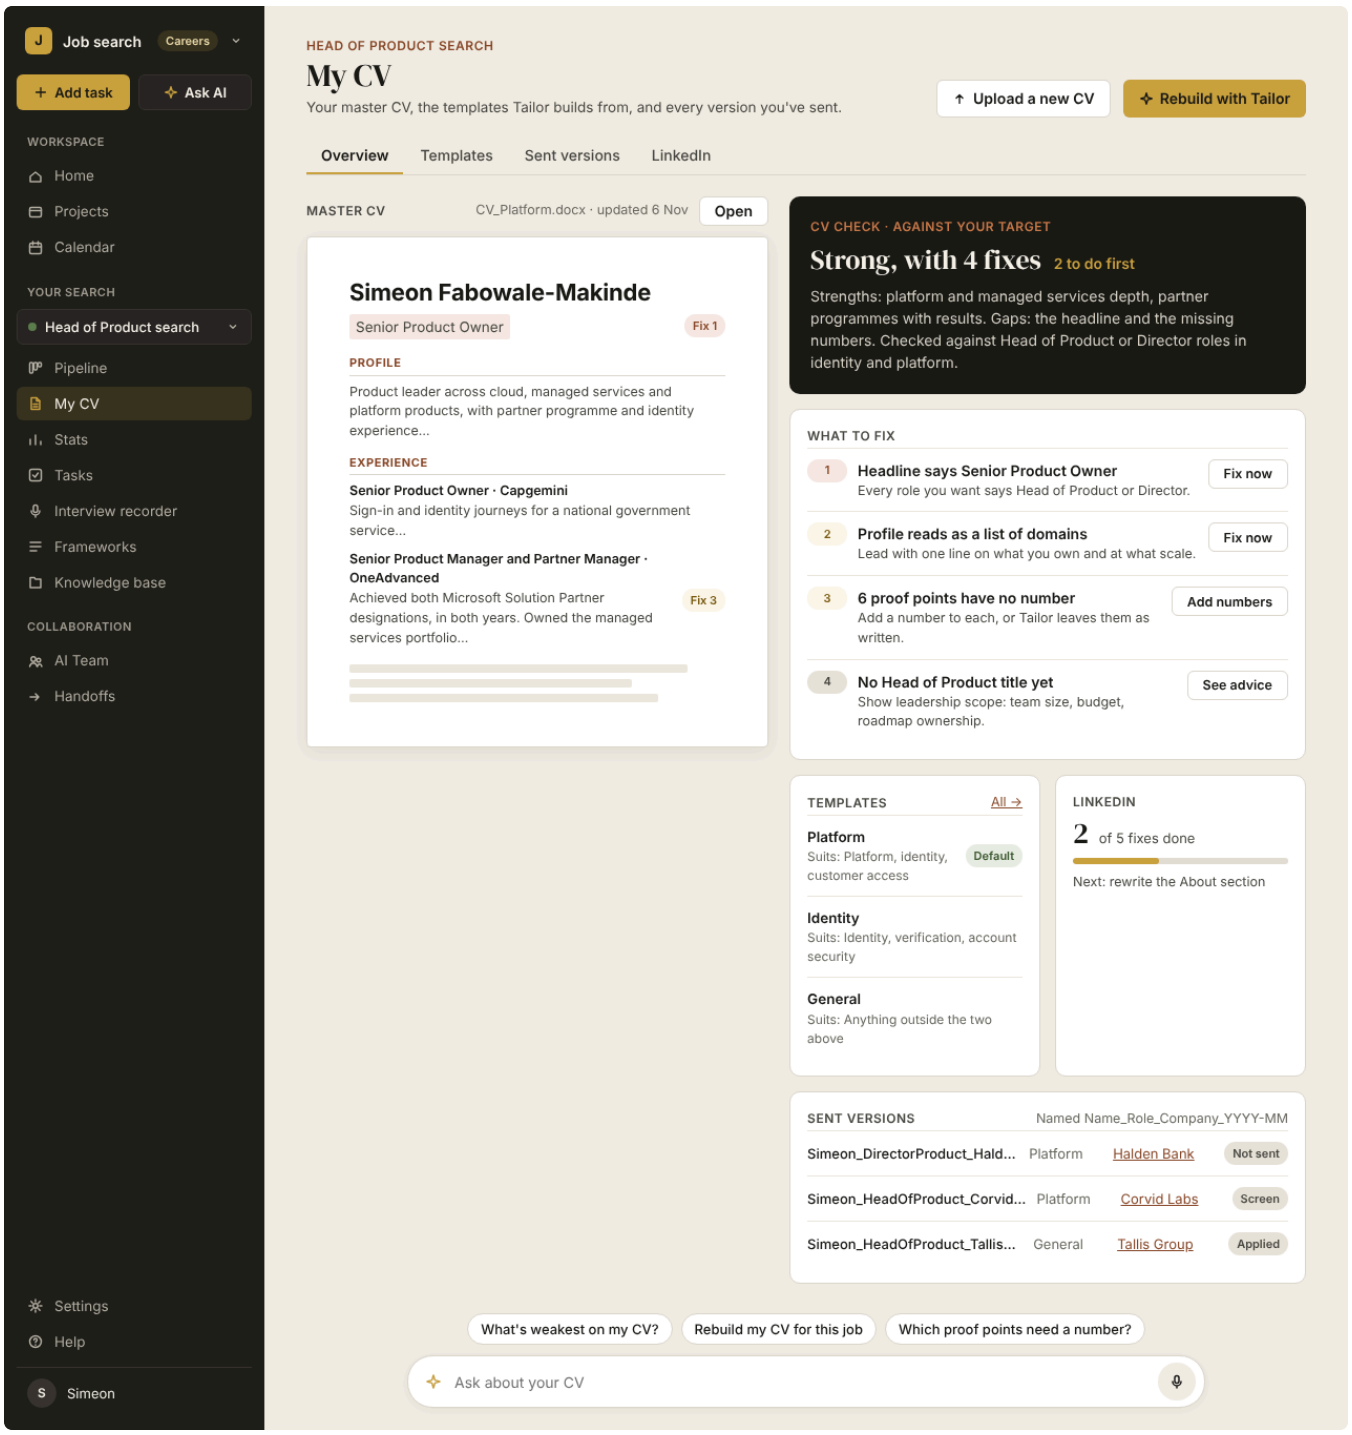


Stats

Stats takes Overview's slot and its Pack C layout: header, a dark card beside a progress card, a row of three cards, a bottom row of three.

Header: eyebrow is the search name, title "Stats", the target line under it, "Weekly review" and ⋯ on the right. Date range and search filter chips sit under the header.

Row	Overview (Pack C)	Stats
Row 1, dark card	DO THIS NEXT	YOUR WEAKEST STAGE: the stage with the lowest conversion, its rate, the likely cause and the fix from the improvement playbook. "Add the fix to Tasks" assigns it to the owning role, named beside the button
Row 1, progress card	% done, Now / Next / Later	Applied this week against target with a bar, then total applied, interviews and offers to date
Row 2	What matters now, Resolve suggests, Project context	Funnel (drawn: a bar per stage, count, biggest drop named) · Rejections by stage · Response rate and average days to hear back
Row 3	Mini Tasks board	Results by source (Scout, own hunt, recruiter, referral) · Results by verdict and CV template · Interview scores over time, from the recorder

- When a stage holds fewer than 5 roles, its card says "Too few roles to judge yet" in place of a rate. The threshold of 5 is a proposal.
- Improvement owners: low volume goes to Scout, low screen rate to Tailor, low interview conversion to Coach, weak offer terms to Negotiator.
- Empty: "No applications yet." with + Add a job. Error: the card that failed shows its error, the rest load.

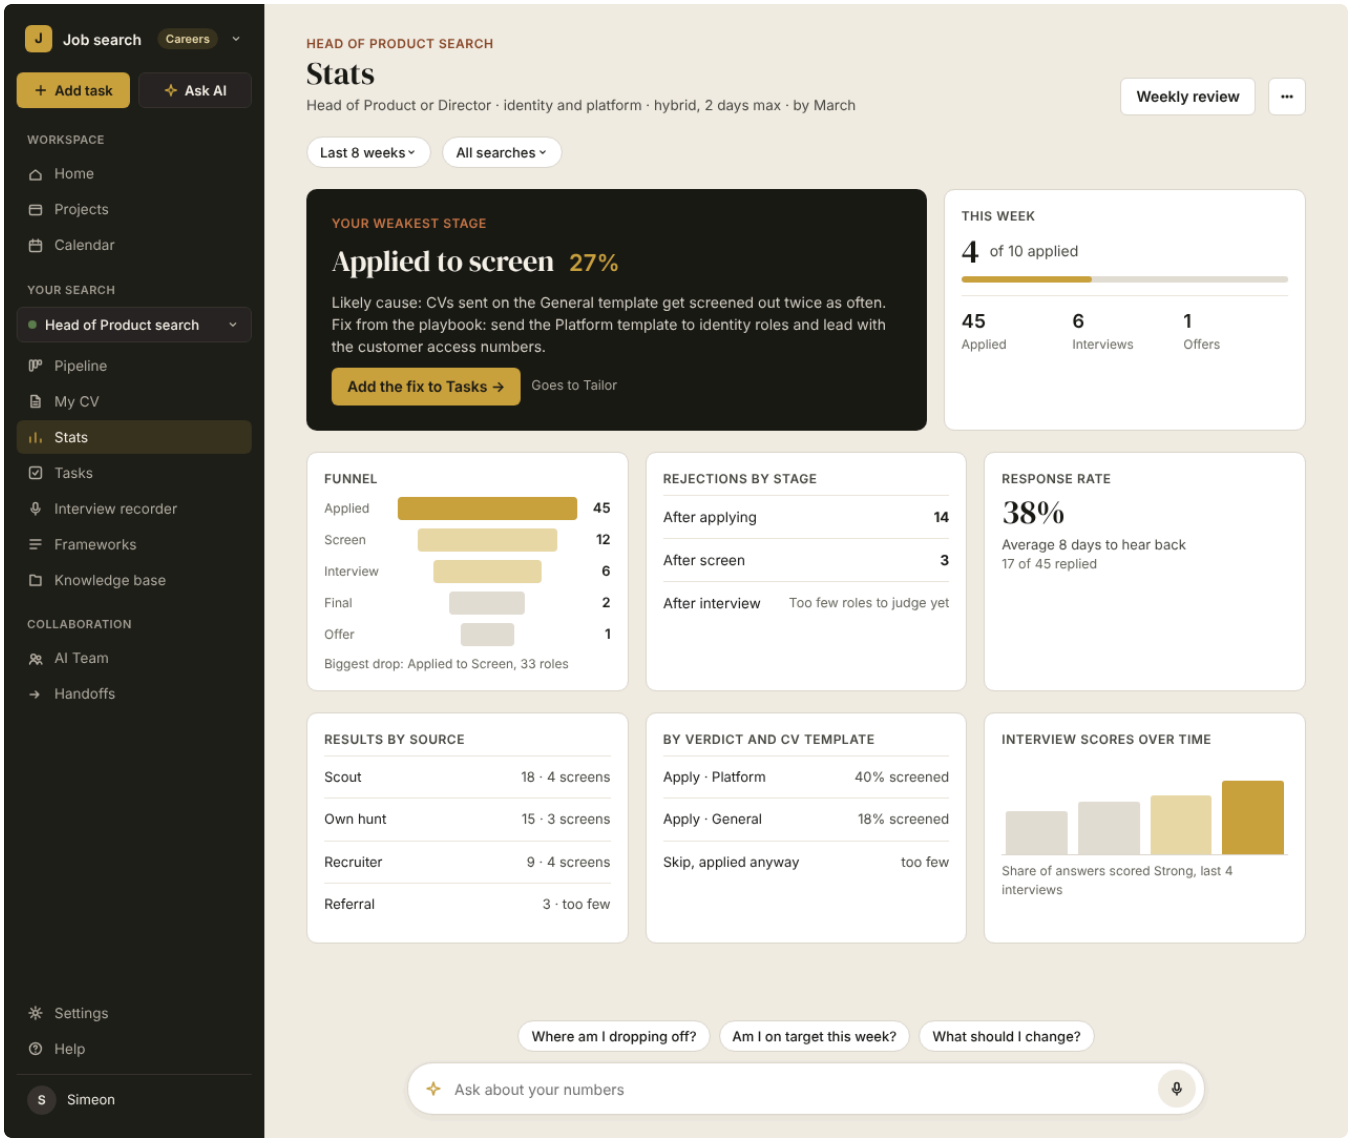


Tasks and Calendar

Both keep the built screens. Only content changes.

Tasks


1. List sections: Now, Waiting to hear back (the built "Waiting on", renamed in this mode, with days since applying as a tag), Upcoming ("Upcoming from roadmap" becomes plain Upcoming, because Careers has no Roadmap).
2. New in the + Add task menu: "From a template", a tinted group under Blank task. Templates: Follow up on an application (due 7 days after applying), Prepare for an interview, Send a thank-you note, Chase a recruiter, Fix a LinkedIn item, Practise a drill, Prepare an offer response.

3. Each task made from a template links to its Pipeline record. The menu says so in a footnote.

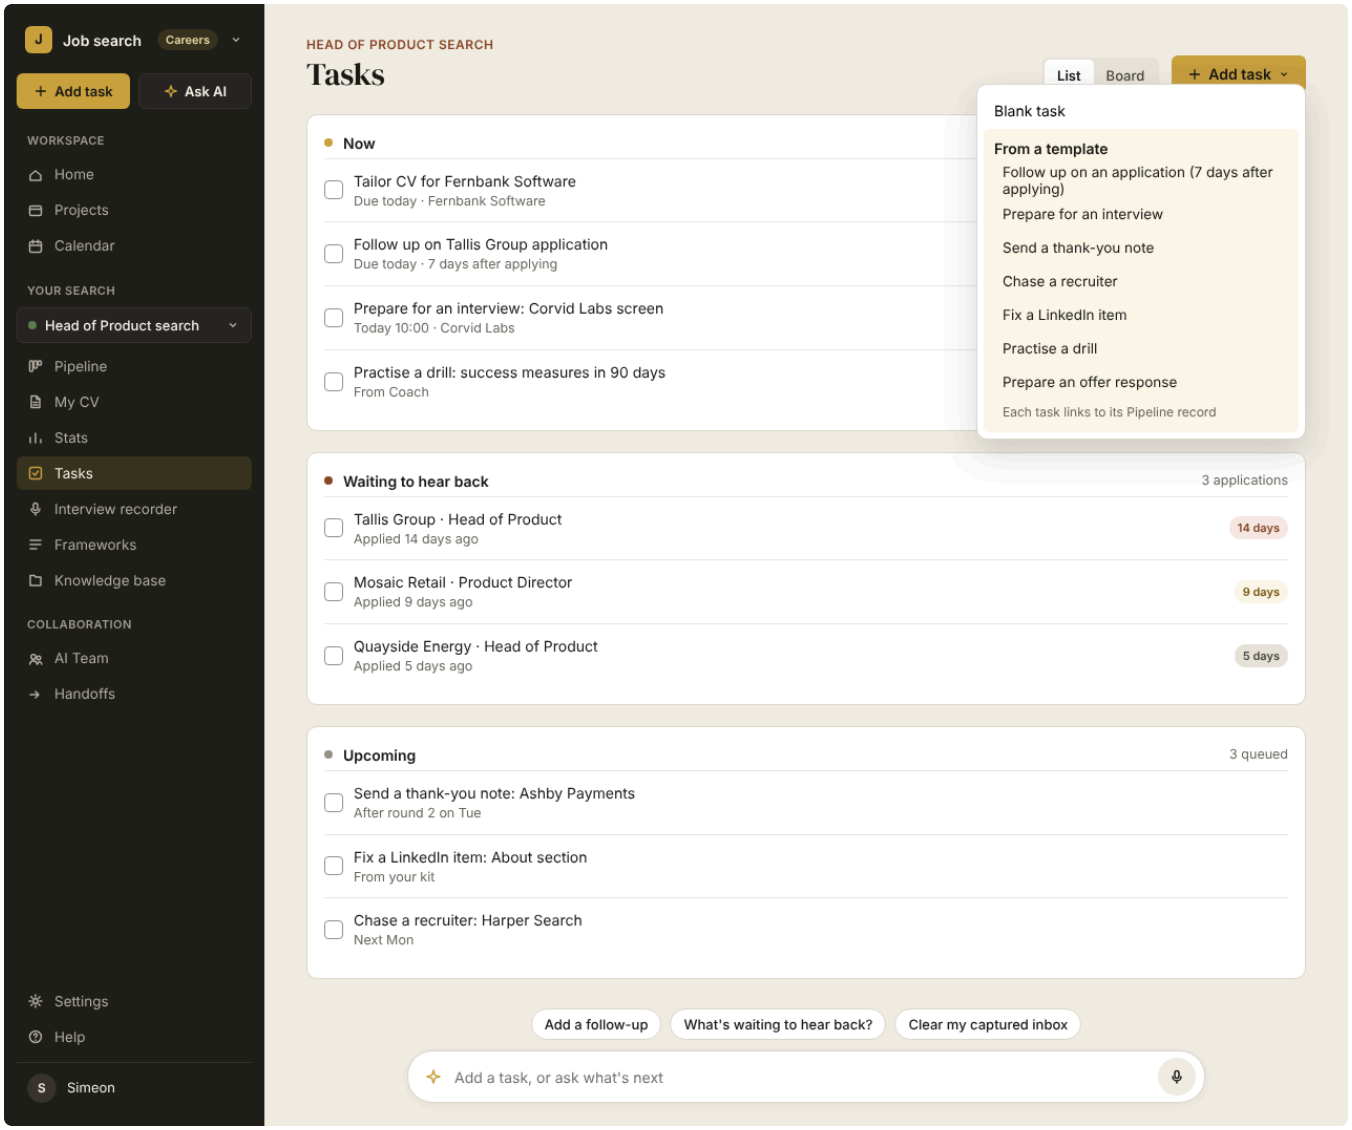

Calendar

1. A new Careers workspace starts with four calendars in the left CALENDARS list, each with its own colour and toggle: Interviews (terracotta), Closing dates (amber), Follow-ups (green), Offer deadlines (ink soft). These do the job of tags with no new UI.
2. Each event links to its Pipeline record.
3. Events the tracker added show an "Added from Gmail" tag in the event editor, with "Prep me" and "Open in recorder" for interviews.

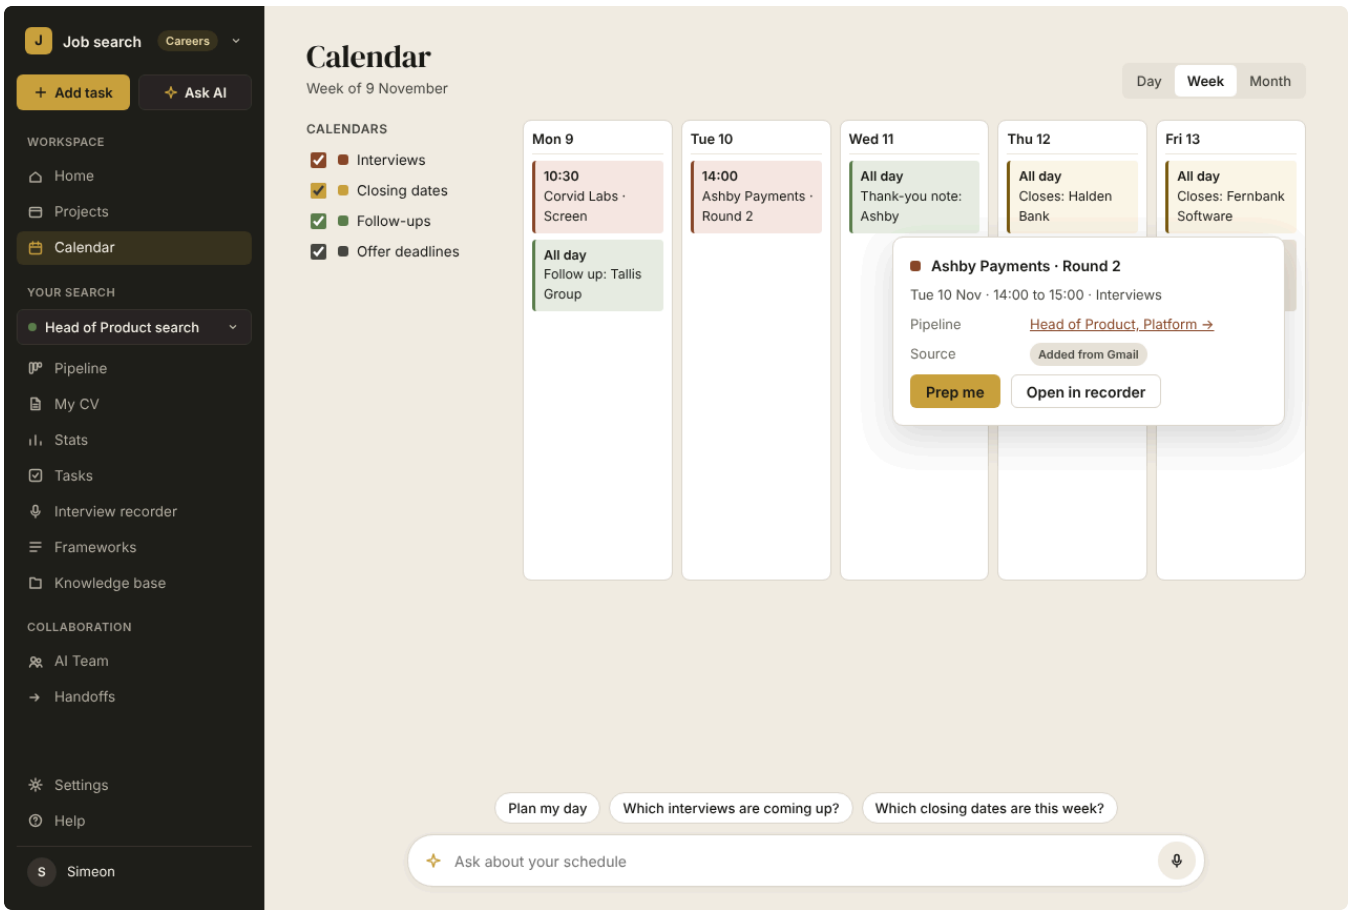


Interview recorder

A new view in YOUR SEARCH. Layout follows AI Team (Pack C): a left column of 280, a main panel on the right with three tabs: Prep, Recording, Analysis.

Left column: upcoming interviews (from Calendar) at the top, then past ones by role and round, each with its score. The selected one has an amber-light row.


Prep

Two columns. Left: the Cockpit sheet from Frameworks for this role, editable (running order, key numbers, answers on pay and logistics, likely objections, questions to ask), plus buttons for the 90-day plan and six-month plan. Right: the drills Coach set, each tagged with how the user did last time, and "Drill me now".

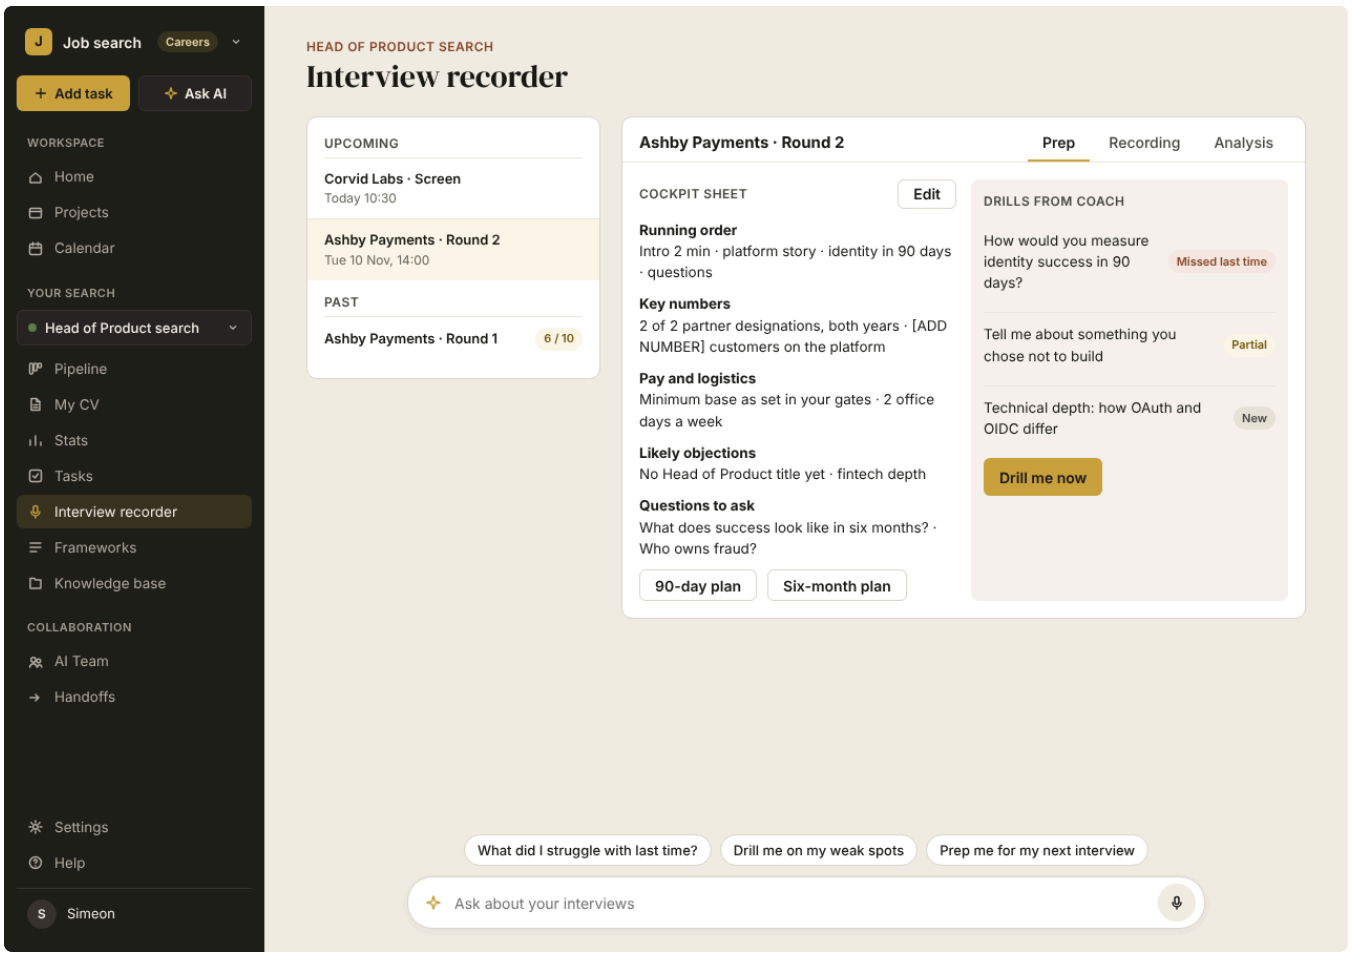


Recording

1. Consent step first, in an amber panel: "Tell the interviewer you're recording and ask permission", with a tick to confirm. No tick, no recording.
2. Three ways in, as selectable cards: Record on this PC (microphone and system audio), Upload a recording, Record a voice debrief.
3. The record button reuses the Phase 0 voice capture component, with a running timer and a status line.

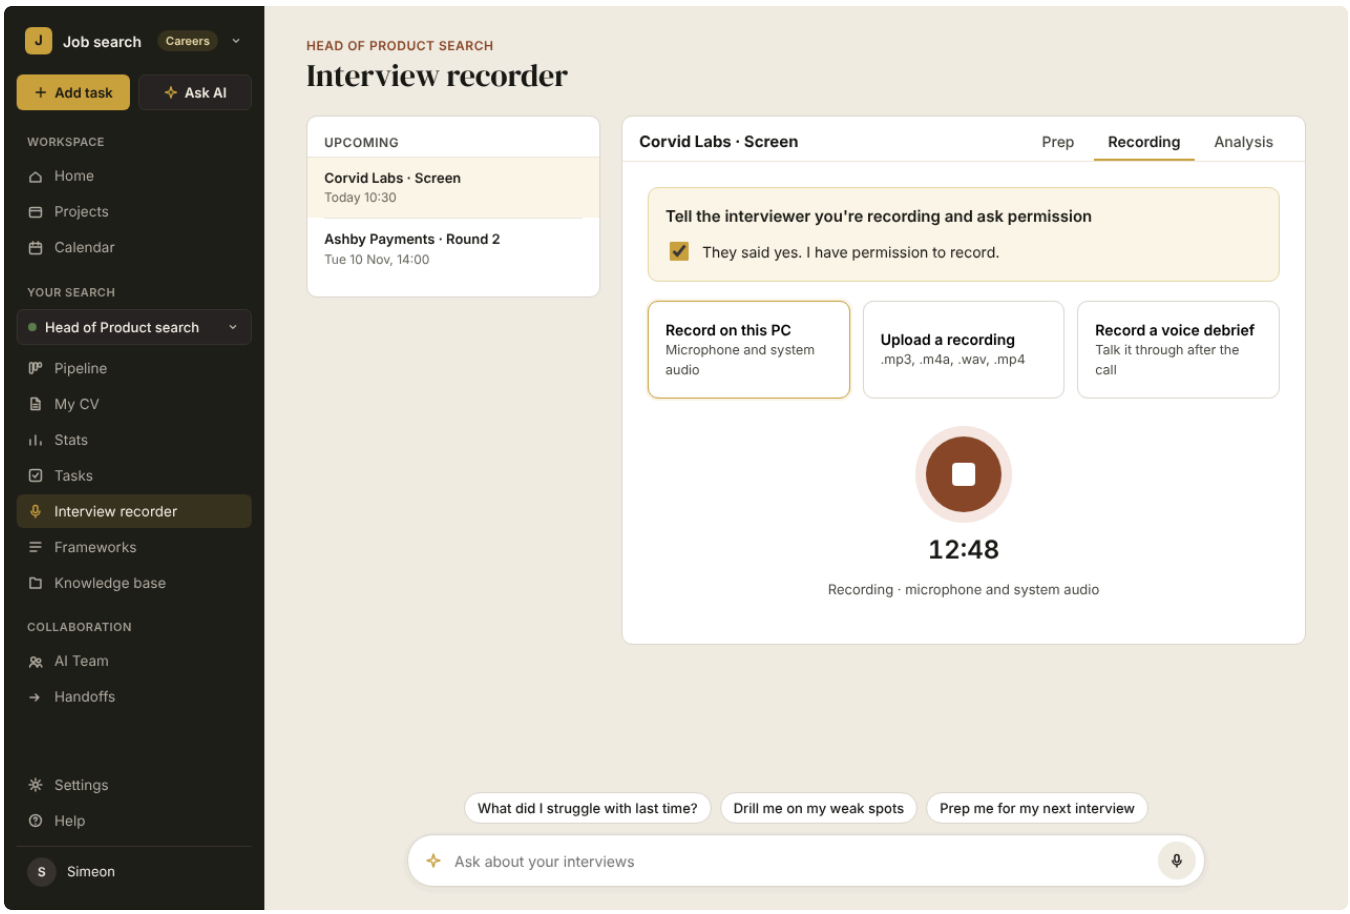

Analysis

1. Score summary: counts of Strong, Partial and Missed in three tinted tiles.
2. Questions asked: timestamp, question, a line on what happened (where depth ran out or the thread was lost, with timestamps), and the score tag.
3. Two panels: Not prepared for, and Strongest moment.
4. Send the results: "Make n drills for Coach", "Review n new proof point" (the user confirms each before it joins the evidence bank), "Save summary to Pipeline". Scores feed Stats automatically.
5. The full transcript, split by speaker, opens from each timestamp.

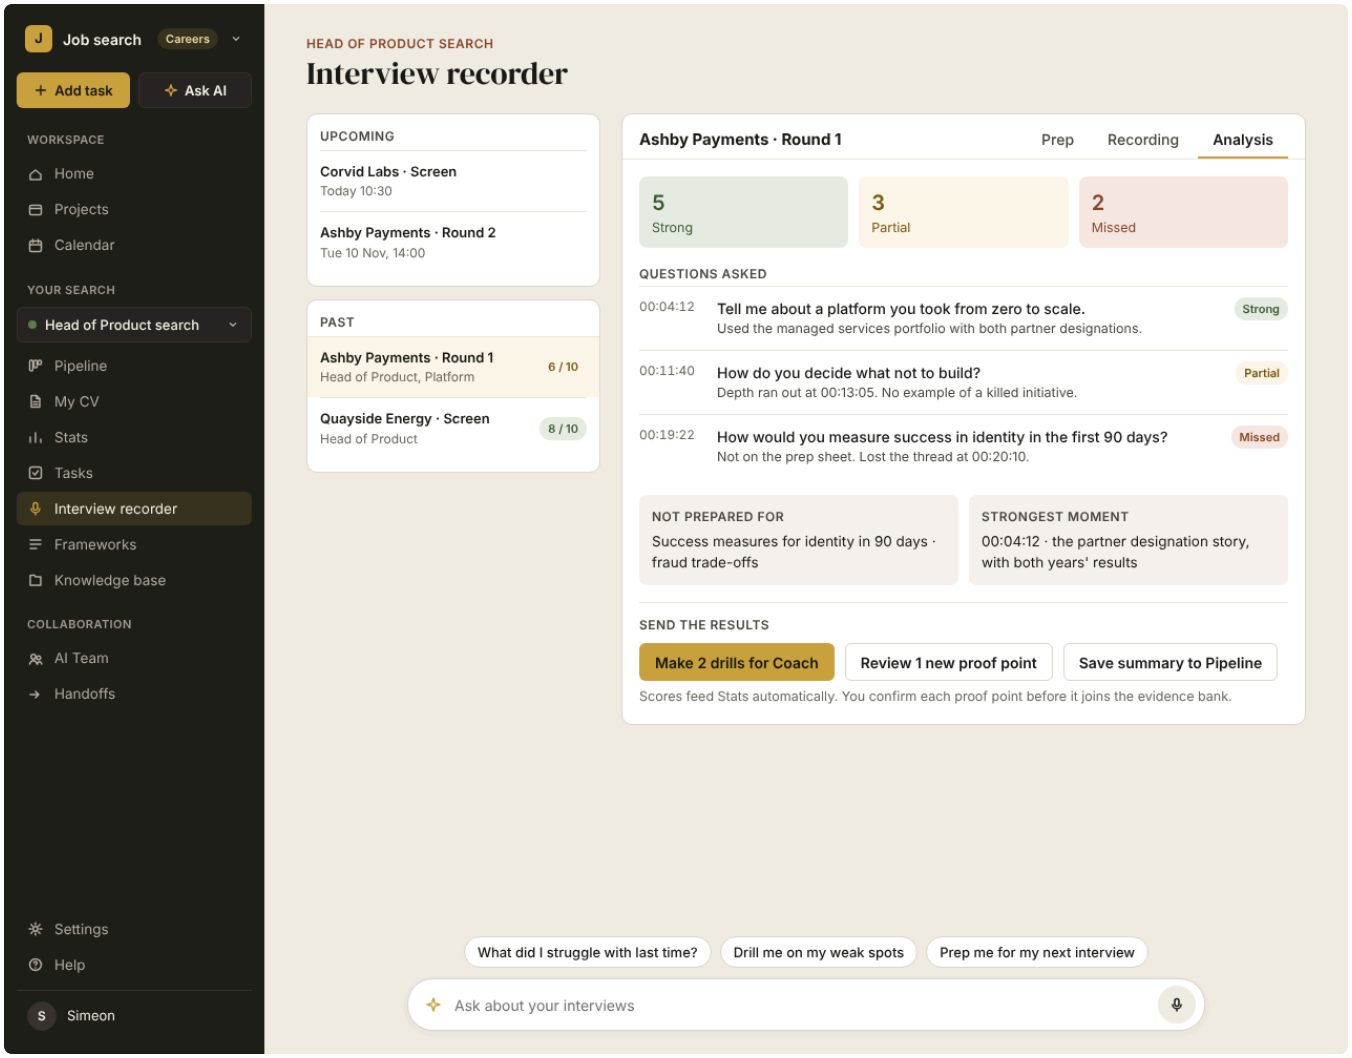

States: empty "No interviews yet. They appear here once one is in your calendar." Loading "Transcribing your recording… about a minute per 10 minutes of audio" (to measure). Error "Resolve couldn't transcribe that recording. It's saved, so you can try again."


Frameworks and Knowledge base

Frameworks

Keeps the Pack C layout: header, registry strip of method cards, the selected method below, a 400 wide editor panel beside it. The Careers registry replaces Hypothesis Zero with these entries, in order. The job team always uses the latest saved version. The "More methods later" dashed card stays.

Method	What the user sees	Read by
Gates	A list of rules, each with a Hard gate or Preference pill. Click one to edit: the rule, Hard or Preference (segmented control), why it matters. Set by intake. "+ Add a gate"	Reviewer, on every job
CV templates	Each template with the roles it suits. Open, edit, set as default	Tailor
Cover letter	The template and its structure	Tailor
Interview prep	Cockpit sheet (one page: running order, key numbers, answers on pay and logistics, likely objections, questions to ask), 90-day plan, six-month plan, technical-depth drills	Coach
Offers and negotiation	Offer comparison, market rate check, counter-offer plan	Negotiator
Improvement playbook	For each weak stage: likely causes, the fix, and which role owns it	Stats
Advice	Short practical guides	Everyone


The gate editor explains the difference in one line: "A hard gate fails the job. A preference only lowers its score."

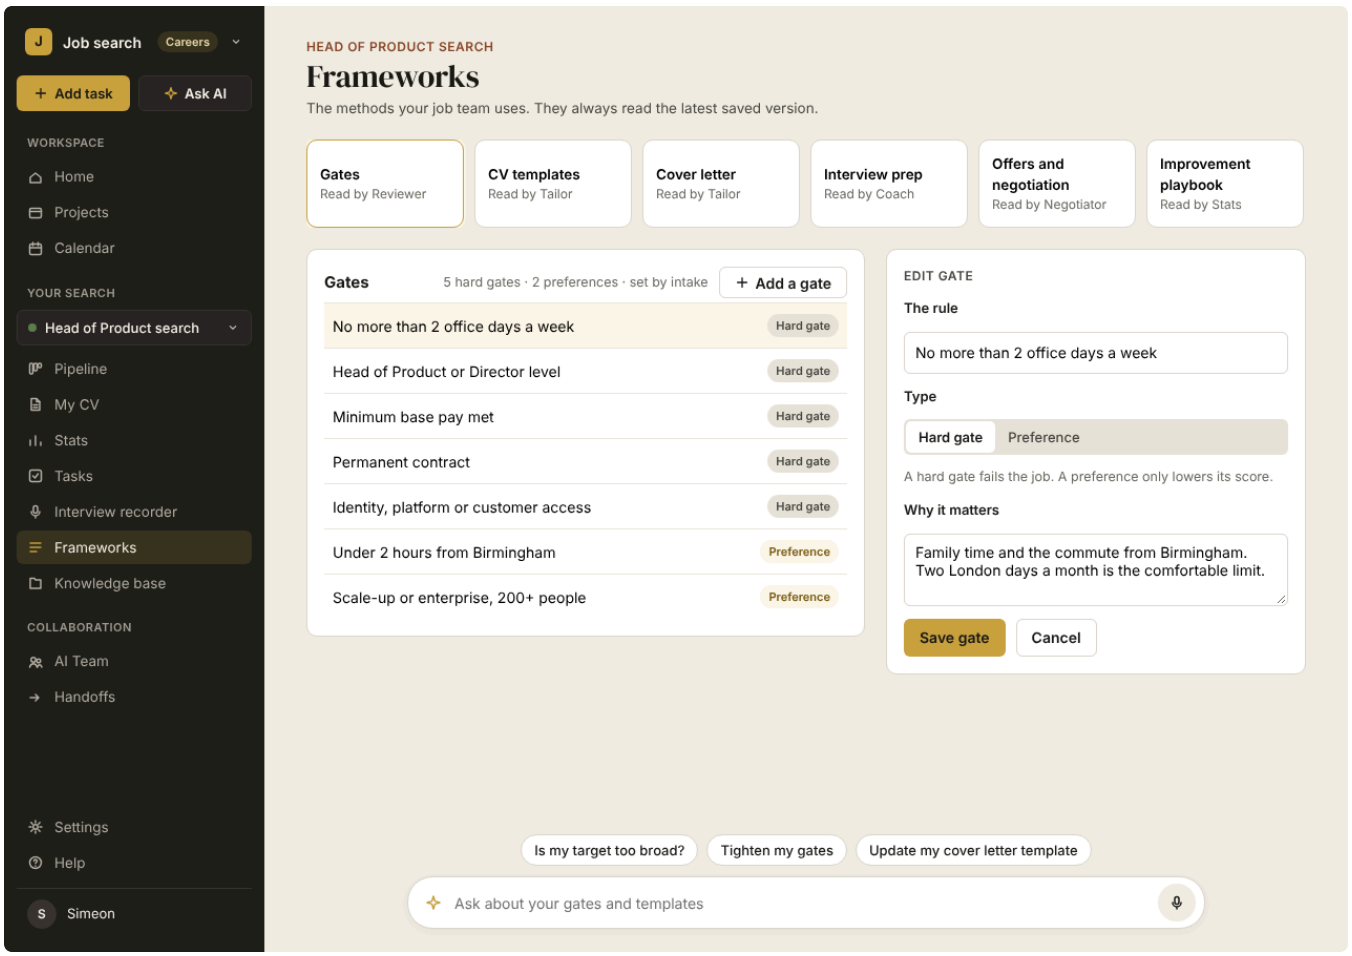

Knowledge base

Keeps its layout: find field, + Add, tabs, card library, grounding bar, file preview panel. Careers tabs replace `KNOWLEDGE_TABS`: CVs and cover letters, Evidence bank, LinkedIn, Job ads, Interview notes, Offers, Advanced: databases.

1. Evidence bank tab: filter chips by theme with counts (the selected chip is dark). Cards in two columns. An entry holds the proof point, theme tag, the role it came from, a number where one exists (green tag), and its source. Entries without a number show a "Needs a number" amber tag.
2. Grounding bar: "Resolve reads everything here when it reviews a job or writes a CV. 9 files, 24 proof points."
3. The built automatic sorting files each new document into one of these tabs and says where.

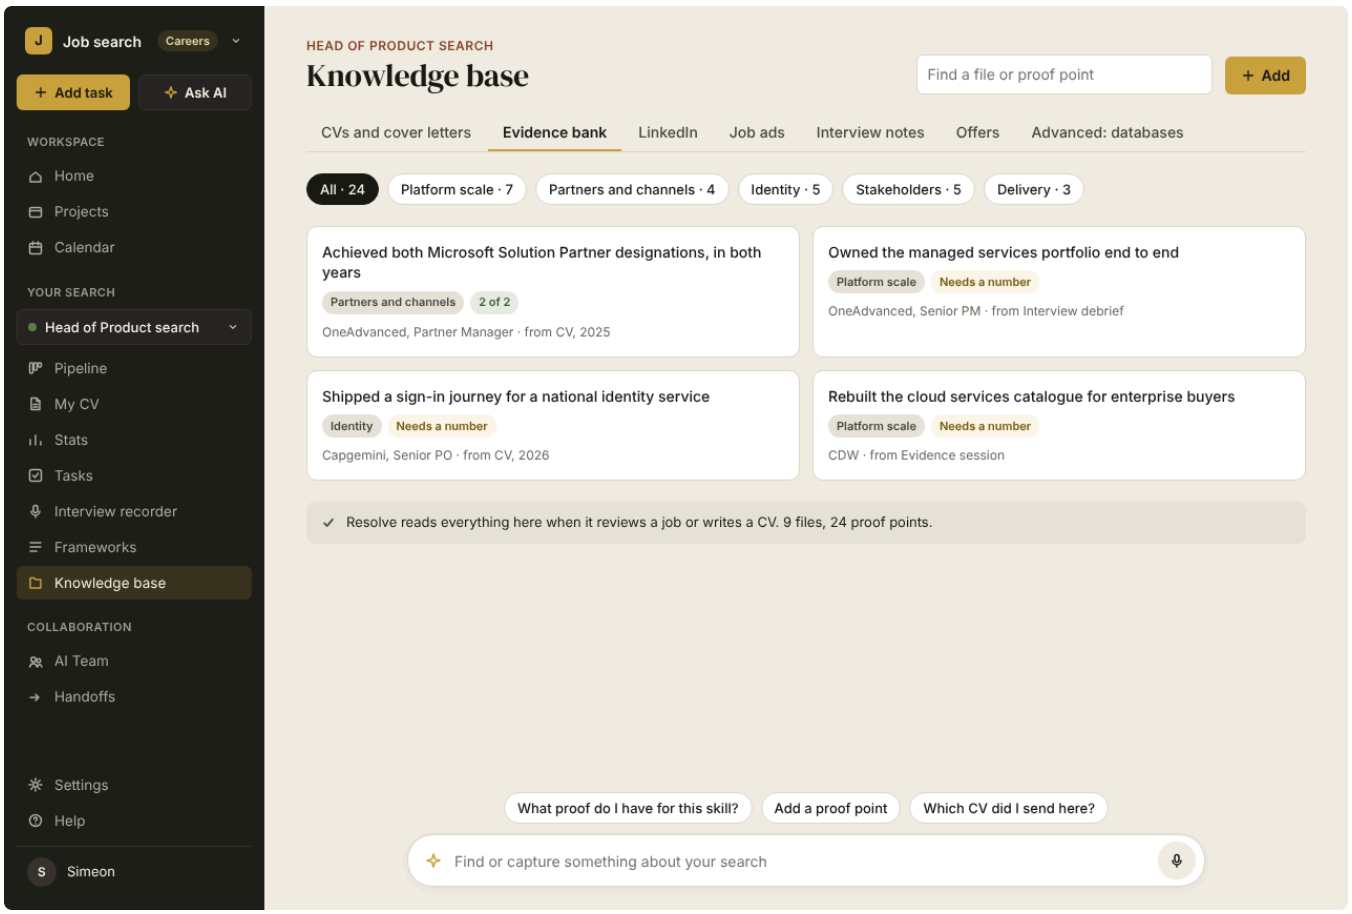

AI Team and Handoffs

AI Team keeps the Pack C layout: role cards in one row (same height, highlight border only on the selected card), chat below, PROPOSED CHANGE cards with "Add it" and "Not now". A line under the title says: "The tracker runs on its own. Improvement fixes come from Stats and go to the role that owns them."

Card	What it does	Action it offers
General assistant	Same chat as Ask AI	None
Scout	Sources roles on a schedule the user sets, scores them against the gates, drops them into Sourced. Sets the daily hunt with sites and search strings	Start my daily hunt
Reviewer	Runs the gates on every job added	Review a job

Card	What it does	Action it offers
Tailor	Writes the CV and cover letter from templates, the evidence bank and the job ad. Never invents a fact. File names follow Name_Role_Company_YYYY-MM	Tailor CV and cover letter
Coach	Prep, Cockpit sheet and drills, using recorder findings	Prep me for an interview
Negotiator	Compares offers, checks market rate, plans the counter-offer	Compare offers

- Chat header: role name, "Reads your gates, CVs, evidence bank and Pipeline", and the role's action button.
- Not roles: the tracker (automatic) and improvement (Stats plus the playbook).
- A Tailor reply says which template and proof points it used and which points it left as written because they have no number.

Image — Team screen

Handoffs: unchanged from PM mode. No Careers screen is drawn.

Settings and Help

Settings

Unchanged except two tabs. The built app's tabs are AI, General, Your data, Advanced. The screens use the Phase 5 names from the design brief, AI and MCP and Workspaces. Confirm the tab names against the Phase 5 design before building.

1. AI and MCP gains a Gmail card for the tracker: status tag, what it reads ("confirmations, replies, rejections and invites"), that every change undoes, and Connect Gmail. The connection method is open (see open questions).

Image — SettingsAI screen

2. Workspaces lists every workspace with its mode tag (Careers or PM), created date and Open. Footnote: "A workspace's mode is set when it is created. Switching workspace switches the mode."

Image — SettingsWorkspaces screen

Help

A Careers `GUIDE` with one section per Careers screen, same layout as the built Help: section list on the left, article on the right, Report a problem at the end. Sections: Start a job search, Home, Pipeline, My CV, Stats, Tasks, Interview recorder, Frameworks, Knowledge base, AI Team, Calendar, Handoffs. The canvas shows the Pipeline section written out.

Image — Help screen

Empty, loading and error states

Every Careers view needs full, empty, loading and error. The rule: an AI failure stays inside the card that failed, and everything that comes from local data still loads. Empty states use one centred card: an icon in a surface circle, a serif line, one dim sentence, and the next action.

Screen	Empty	Loading	Error
Home	First move from the intake in the hero, the Add a job box, "0 of 10 applied"	Hero shows grey bars and "Loading your day…". Right cards show skeletons	Hero: "Resolve couldn't plan your day just now." with Try again and Open today's tasks. Add a job: "Reviewer couldn't check this job. It's saved in Sourced, so you can review it later."

Screen	Empty	Loading	Error
Pipeline	"No roles yet." with Add a job and Start my daily hunt	As built Tasks board	A failed tracker change appears in NEEDS A CHECK
My CV	"No CV yet." with Upload a CV and Build one with Tailor	CV check card loads alone	CV check card shows its error, the preview and lists load
Stats	"No applications yet." with + Add a job	Per card	Weakest stage card: "Resolve couldn't work out your weakest stage." with Try again. Numbers from local data still show
Interview recorder	"No interviews yet. They appear here once one is in your calendar."	"Transcribing your recording… about a minute per 10 minutes of audio", with a bar	"Resolve couldn't transcribe that recording. It's saved, so you can try again." with Try again and Upload a different file

Not drawn, to build as above: loading and error for Pipeline, My CV, Frameworks, Knowledge base and AI Team; empty for Frameworks, Knowledge base and AI Team.

Image — StateHomeEmpty screen

Image — StateHomeLoading screen

Image — StateHomeError screen

Image — StatePipelineEmpty screen

Image — StateCVEmpty screen

Image — StateStatsEmpty screen

Image — StateStatsError screen

Image — StateRecorderEmpty screen

Image — StateRecorderLoading screen

Image — StateRecorderError screen

Build phases, done-when and open questions

Build after redesign Phases 3, 4 and 5, because Careers reuses the new intake frame, the project sections' layouts and the Settings tabs. One prompt per step, in this order. Each step merges only after its done-when checks pass.

Step	Scope	Sections
1	Modes: the mode field and per-mode tables, PM unchanged	Modes
2	Careers intake: path card, targets, careers copy on every screen, the kit, Adopt into a Careers workspace	Intake

Step	Scope	Sections
3	Shell and daily screens in Careers mode: sidebar, switcher labels, Ask wording, Home cards, Projects cards, Tasks templates, starter calendars	Shell, Home, Projects, Tasks and Calendar
4	Pipeline and the record, then the tracker	Pipeline
5	My CV	My CV
6	Stats	Stats
7	Frameworks, Knowledge base and AI Team in Careers mode, Settings and Help	Frameworks and Knowledge base, AI Team, Settings and Help
8	Interview recorder	Interview recorder

My CV is placed after the Pipeline because its Sent versions card links to Pipeline records. That order is a proposal.

Done when (every step)

- [ ] Self-test passes, including every PM workspace loading unchanged.
- [ ] Each Careers view has screenshots in full, empty, loading and error at 1280 × 800 and 1920 × 1080.
- [ ] No colour or size literal outside `theme.rs` and `widgets.rs`.
- [ ] Every move, delete and AI write undoes from a toast.
- [ ] Simeon has seen the screenshots.

Open, for Tech Lead

1. Scout's job source: job board feeds, saved searches, or AI search.
2. Gmail for the tracker: how a desktop app reads it.
3. Recording system audio and transcribing on Windows.
4. Fetching job links: many sites block it. Fallback is paste text or a screenshot.
5. Pipeline storage: the CRM database or a new model type.

Open, for Simeon

1. Pipeline as its own sidebar item, in place of living inside Projects. The screens assume yes.
2. The Stats threshold for "too few to judge": proposed fewer than 5.
3. Middle group name: YOUR SEARCH.
4. Intake 12 AI limit copy: confirm it matches the PM screen.
5. Settings tab names: AI and MCP and Workspaces, or the built names.

Screen index

All 46 artboards on the Resolve Careers canvas, by row. Use the artboard name to point a prompt at a screen.

Canvas row	Artboards
Intake 01 to 05	Intake01, Intake02a, Intake02b, Intake02c, Intake03, Intake04, Intake04b, Intake05
Intake 06 to 12	Intake06, Intake07, Intake08, Intake09, ProposalEditor, Intake10, Intake11, Intake12
Daily screens and the Pipeline	Main (Home), Switcher, Projects, Pipeline, PipelineList, PipelineClosed, Record, MyCV, Stats
Tasks, Calendar and tools	Tasks, Calendar, RecorderPrep, RecorderRecording, Recorder, Frameworks, Knowledge, Team
Settings and Help	SettingsAI, SettingsWorkspaces, Help
States	StateHomeEmpty, StateHomeLoading, StateHomeError, StatePipelineEmpty, StateCVEmpty, StateStatsEmpty, StateStatsError, StateRecorderEmpty, StateRecorderLoading, StateRecorderError

Source: Resolve careers version design brief, 10 Nov 2026, and `theme.rs` at 0a8d0c7.